



Door & Window Seals

- *aquamac door & window seals - page 151-152*
- *rebate seals - page 152*
- *weather bars - page 153*
- *dry glazing / glazing / security tapes - page 153*
- *fire & smoke seals - page 154*
- *sliding sash seals - page 154*
- *other seals - page 154*



Aquamac 21 Weatherseal

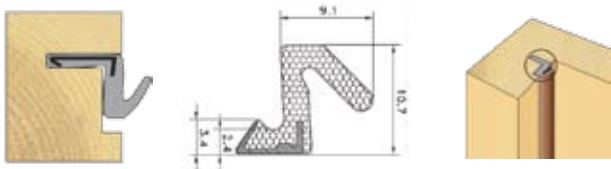


Impervious to both paint and stain. High wear resistance unaffected by rot or mould. Excellent memory and compression set. Water repellent foam that will not freeze. Immune to the affects of uv light or ozone. Easily installed with rigid foot. Compensates for any sash or frame movement. High performance over a temperature range. Suitable for most timber applications.

Use in conjunction with Aquamac Recesser (26280).

Colour:	Length:	Order Codes:
White	25m	19008
White	250m	19006
Bronze	25m	19007
Bronze	250m	19005

Aquamac 63 Weatherseal

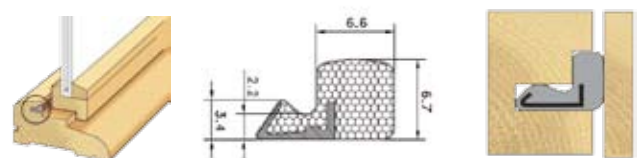


Impervious to both paint and stain. High wear resistance unaffected by rot or mould. Excellent memory and compression set. Water repellent foam that will not freeze. Immune to the affects of uv light or ozone. Easily installed with rigid foot. Compensates for any sash or frame movement. High performance over a temperature range. Suitable for most timber applications.

Use in conjunction with Aquamac Recesser (26281).

Colour:	Length:	Order Codes:
White	25m	19004
White	300m	19002
Bronze	25m	19003
Bronze	300m	19001

Aquamac 109 Weatherseal

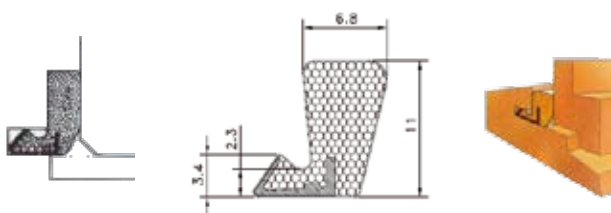


Smoke retardant. Durable and UV Resistant polyethylene cladding bonded to resilient urethane foam for an outstanding sealing against air and water infiltration.

Recommended Kerf Width: 2.7mm, Depth: 6.0mm.
Seal Gap: 3.5-5.5mm

Colour:	Length:	Order Codes:
White	250m	19010
Bronze	250m	19009


Aquamac 124 Weatherseal

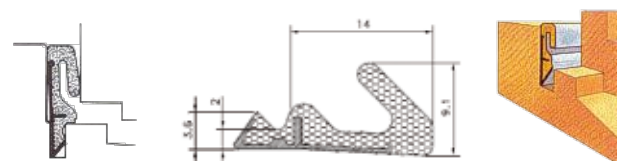

Lifetime guarantee impervious to both paint and stain. High wear resistance unaffected by rot or mould. Excellent memory and compression set. Water repellent foam that will not freeze. Immune to the affects of uv light or ozone. Easily installed with rigid foot. Compensates for any sash or frame movement. High performance over a temperature range. Suitable for most timber applications.

Colour:	Length:	Order Codes:
White	25m	19041
White	125m	19040
Bronze	25m	19043
Bronze	125m	19042

Aquamac 89 Weatherseal




Impervious to both paint and stain. High wear resistance unaffected by rot or mould. Excellent memory and compression set. Water repellent foam that will not freeze. Immune to the affects of uv light or ozone. Easily installed with rigid foot. Compensates for any sash or frame movement. High performance over a temperature range.

Sold In:
2.1m lengths

Colour:	Order Codes:
Brown	19049

Window Rebate Seal




Complex Exitex joinery seal. Traditional compression joinery seal. High quality, shatterproof material suitable for 3mm retaining grooves.

Size:
10mm rebate

Length:
45m

Colour:	Order Codes:
White	19033
Brown	19032

Straight Rebate Seal

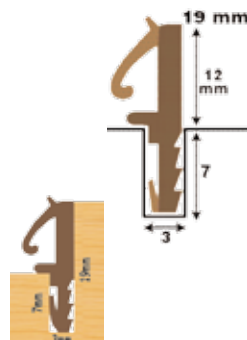


Complex Exitex joinery seal. Traditional compression joinery seal. High quality, shatterproof material suitable for 3mm retaining grooves.

Size:
12mm rebate

Length:
50m

Colour:	Order Codes:
White	19026
Brown	19025

Straight Rebate Seal

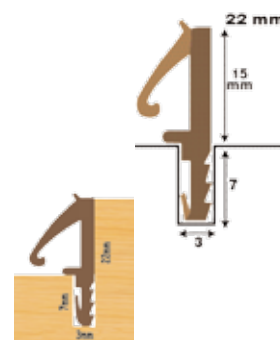


Complex Exitex joinery seal. Traditional compression joinery seal. High quality, shatterproof material suitable for 3mm retaining grooves.

Size:
15mm rebate

Length:
50m

Colour:	Order Codes:
White	19029
Brown	19028

Tubex Bubble



Exitex joinery seal seals gaps from 3 to 5mm.


Made from high quality PVC nitrile.

Diameter:
6mm

Length:
100m

Colour:	Order Codes:
White	19036
Brown	19035

Tubex Bubble



Exitex joinery seal seals gaps from 3 to 6.5mm.

Made from high quality PVC nitrile.

Diameter:
7.5mm

Length:
100m

Colour:	Order Code:
Brown	19037

JSIF Instafit Seal



Exitex joinery seal seals gaps from 4 to 7mm.


Made from TPE.

Ideal for door and window frames.

Length:
150m

Colour:	Order Codes:
White	19051
Brown	19050

P-Strip Draft Seal





Exitex joinery seal. Good for retro fit. Self adhesive, multi purpose profile seal. Non stretch, soft profile EPDM will not absorb water.

Length:
5m

Colour:	Order Codes:
White	19111/W
Brown	19111/B
Black	19111/BL


Weather Bar with Flap



Improved weather performance over galvanised or plain plastic bars. Will not crack or shatter in sub-zero temperatures. Flexible seal is protected from damage by foot traffic treading on the bar.

Length: 3m Order Code: **19011**

Weather Bar with Bubble



Improved weather performance over galvanised or plain plastic bars. Will not crack or shatter in sub-zero temperatures. Flexible seal is protected from damage by foot traffic treading on the bar.

Length: 3m Order Code: **19012**

Metal Galvanized Weather Bar



Size:
Width: 24mm
Thickness: 6mm

Length: 2m Order Code: **19013**

Security Glazing Tape 1.5mm x 9mm x 40m



The unique adhesive system is specifically designed for window and door glazing applications. The exposed side adhesive is specifically designed for adhesion to sash and frame materials and the liner side adhesive is specifically designed for adhesion to glass.

These surface specific adhesives provide optimum performance, weather resistance, and longevity.

Colour: Order Codes:
White **19057/WH**
Black **19055/BL**

Security Glazing Tape 3mm x 9mm x 25m



The unique adhesive system is specifically designed for window and door glazing applications. The exposed side adhesive is specifically designed for adhesion to sash and frame materials and the liner side adhesive is specifically designed for adhesion to glass.

These surface specific adhesives provide optimum performance, weather resistance, and longevity.

Colour: Order Codes:
White **19057**
Brown **19056**

Security Glazing Tape 4mm x 12mm x 20m



The unique adhesive system is specifically designed for window and door glazing applications. The exposed side adhesive is specifically designed for adhesion to sash and frame materials and the liner side adhesive is specifically designed for adhesion to glass.

These surface specific adhesives provide optimum performance, weather resistance, and longevity.

Colour: Order Code:
Black **19055**

Dry Glaze



EPDM tape is non-stretch with one self-adhesive side.

It has excellent compression recovery.

Size:
3mm x 8mm x 150m

Colour: Order Codes:
White **19058/W**
Brown **19058**
Black **19059**

Georgian Bar Tape 1.6m x 16mm x 40m




Permanent solution for fixing glazing bars.

Double side self adhesive tape.

Colour: Order Code:
Black **19059/GEO**

LS Dry Glaze

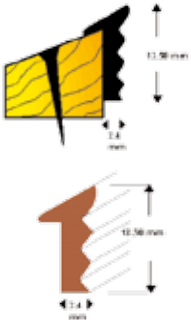


EPDM tape with lip is non-stretch with one self-adhesive side. It has excellent compression recovery.

Size:
3.4mm x 13.5mm

Length:
100m

Colour:	Order Codes:
White	19053
Brown	19052
Black	19054

Intumescent Strip

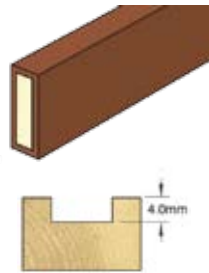

Graphite based intumescent seals. Self adhesive backed as standard. Easy to install and maintain.


Generally for 1/2 hour fire door and passed to B.S. 476 part 22.

Length: 2.1m
Size: 10mm x 4mm

Use in conjunction with Trend Intumescent Strip Cutter (26282).

Colour:	Order Codes:
White	19046
Brown	19045

Intumescent Strip & Smoke Seal

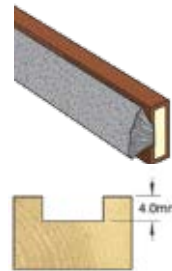


Graphite based intumescent seals with brush. Self adhesive backed as standard. Easy to install and maintain. Generally for 1/2 hour fire door and passed to B.S. 476 part 22 & 31.1

Length: 2.1m
Size: 10mm x 4mm

Use in conjunction with Trend Intumescent Strip Cutter (26282).

Colour:	Order Codes:
White	19048
Brown	19047

Brush Pile Carrier Centre Leg




Simple to install. Low friction pile with single polypropylene fin which provides 50% easier sash movement while providing maximum resistance to air and water penetration. Long life performance.

Length:
2.2m

Colour:	Order Code:
White	92448

Brush Pile Carrier Offset Leg



Simple to install. Low friction pile with single polypropylene fin which provides 50% easier sash movement while providing maximum resistance to air and water penetration. Long life performance.

Length:
2.2m

Colour:	Order Code:
White	92449

Self Adhesive Brush Pile Carrier



Self adhesive, low friction pile with single polypropylene fin which provides 50% easier sash movement while providing maximum resistance to air and water penetration. Long life performance.

Length:
2.2m

Colour:	Order Codes:
White	92501
Brown	92500

Mighton Standard Weather Strip



Multi purpose / position seal.

Seals gaps to 5.5mm. Fits 2.5mm wide x 5mm deep groove.

Can be used on Staff Bead, Bottom, Top and Meeting Rails

Length:
2.4m

Colour:	Order Code:
White	92499

Slidex Perimeter Seal



Tough friction resistant perimeter or centre rail seal. Perimeter or centre rail seal Effective slide or compression seal. Seals gaps to 5mm. Fits 2mm wide x 6mm deep groove.

Length:
3m

Colour:	Order Codes:
White	92502
Brown	92503

TREND Aquamac 21 Recessor

Reduces setting-up time and simplifies machining operations!



- ◆ 54.5mm Diameter
- ◆ 1/2" Shank Diameter
- ◆ For use with Aquamac 21 Weatherseal
- ◆ Comes with guide bearing which:
Reduces setting up time
Simplifies machining
- ◆ Tungsten Carbide tipped




Diagrams of how Aquamac Weatherseal is fitted

Catalogue Code: 26280

TREND Aquamac 21 Weatherseal

A resilient non-stretch and non-shrinking core weatherseal!

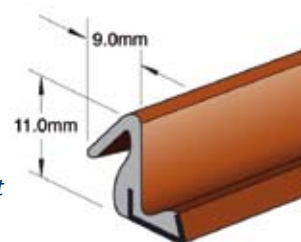

- ◆ Returns to original shape after compression
- ◆ Stretching & shrink back at corners avoided
- ◆ Insert retention leg enables fast & effective insertion
- ◆ Low compression force helps ease window & door operation
- ◆ Maintains weathering characteristics & resists compression
- ◆ Aquamac Weatherseal gives high levels of sound reduction
- ◆ Unaffected by paint, stains, rot, fungi, UV light & ozone
- ◆ Supplied in white or brown as standard
- ◆ Suitable for all main timber window & door types


Catalogue Codes:

Bronze	25m	- 19007
Bronze	250m	- 19005
White	25m	- 19008
White	250m	- 19006

TREND Aquamac 63 Weatherseal

A resilient non-stretch and non-shrinking core weatherseal!

- ◆ Returns to original shape after compression
- ◆ Stretching & shrink back at corners avoided
- ◆ Insert retention leg enables fast & effective insertion
- ◆ Low compression force helps ease window & door operation
- ◆ Maintains weathering characteristics & resists compression

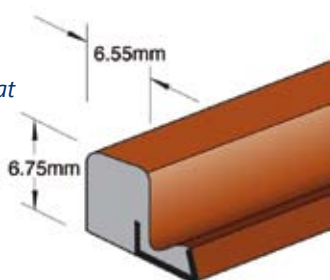

- ◆ Aquamac Weatherseal gives high levels of sound reduction
- ◆ Unaffected by paint, stains, rot, fungi, UV light & ozone
- ◆ Supplied in white or bronze as standard
- ◆ Suitable for all main timber window & door types

Catalogue Codes:


Bronze	25m	- 19003
Bronze	300m	- 19001
White	25m	- 19004
White	300m	- 19002

TREND Aquamac 63 Recessor

Another strong and versatile product from TREND!



- ◆ 41.3mm Diameter
- ◆ 1/2" Shank Diameter
- ◆ For use with Aquamac 63 Weatherseal
- ◆ Allows for a particularly small gap between sash and frame
- ◆ The slot can be positioned part way down the side of the rebate, or at the bottom of the rebate
- ◆ Tungsten Carbide tipped

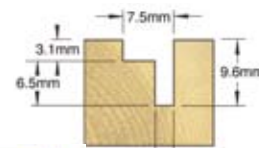

Diagrams of how Aquamac Weatherseal is fitted

Catalogue Code: 26281