


Thresholds & Weatherbars

Thresholds & Weatherbars	165-167
Seals & Accessories	168



Macclex 15/2

- For inward opening doors.
- Under door clearance 13mm.
- Accepts MWK striker block for flush bolts in double doors.
- Suitable for 44mm thick doors.

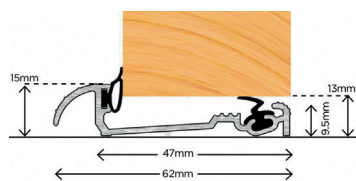

Moderate Exposure


Part M - Approved

Wheelchair Friendly

Size	Aluminium	Gold	Black
914mm	19133	19134	19139
1219mm	19135	19136	19139/1
1829mm	19137/1	19138/1	19139/3
3000mm	19137/4	19138/4	19139/5

Macclex 15/2 TB

- For inward opening doors.
- Thermally broken to prevent condensation.
- Under door clearance 13mm.
- Accepts MWK striker block for flush bolts in double doors.
- Suitable for 44mm thick doors.

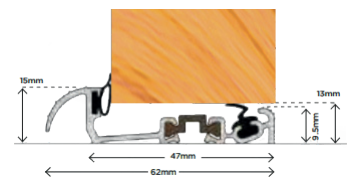

Moderate Exposure


Part M - Approved

Wheelchair Friendly

Size	Aluminium	Gold	Black
1000mm	19425	19426	19427
3000mm	19425/1	19426/1	19427/1

Macclex 15/56

- For inward opening doors.
- Under door clearance 13mm.
- Accepts MWK striker block for flush bolts in double doors.
- Suitable for 56mm thick doors.

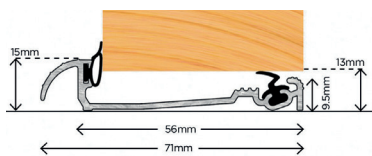

Moderate Exposure


Part M - Approved

Wheelchair Friendly

Size	Aluminium	Gold	Black
914mm	19140	19141	19148
1219mm	19142	19143	19148/1
1829mm	19146	19147	19148/3
3000mm	19146/4	19147/2	19148/7

Macclex 15/56 TB

- For inward opening doors.
- Thermally broken to prevent condensation.
- Under door clearance 13mm.
- Accepts MWK striker block for flush bolts in double doors.
- Suitable for 56mm thick doors.

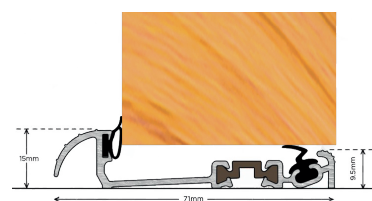

Moderate Exposure


Part M - Approved

Wheelchair Friendly

Size	Aluminium	Gold	Black
1000mm	19477	19478	19479
3000mm	19477/1	19478/1	19479/1

Macclex 15/68

- For inward opening doors.
- Under door clearance 13mm.
- Accepts MWK striker block for flush bolts in double doors.
- Suitable for 68mm thick doors.

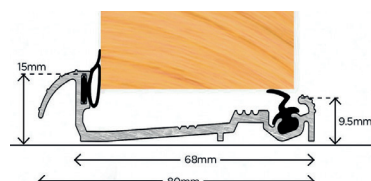

Moderate Exposure


Part M - Approved

Wheelchair Friendly

Size	Aluminium	Gold	Black
914mm	19432	19433	19438
1219mm	19432/1	19433/1	19438/1
1829mm	19432/3	19433/3	19438/3

Macclex Lowline

- For inward opening doors.
- Under door clearance 20mm.
- Accepts standard striker block.

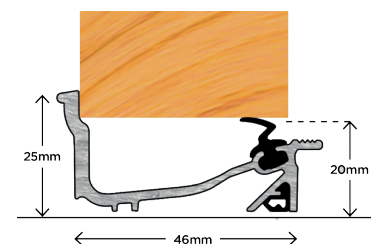


Severe Exposure

Size	Aluminium	Gold	Black
914mm	19203	19203/G	19203/B
1219mm	19204	19204/G	19204/B

Weatherten Lowline

- For inward opening doors.
- Under door clearance 20mm.
- Accepts standard striker block for flush bolts in double doors.

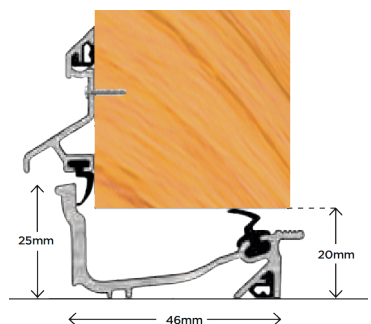


Severe Exposure

Size	Aluminium	Gold	Black
914mm	19130	19130/G	19130/BL
1219mm	19131	19131/G	19131/BL

Mobility Weatherbar Kit 20 (MWK 20)

- For inward opening doors.
- Under door clearance 20mm.
- Rear thermal barrier prevents condensation.

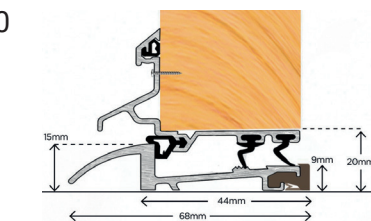

Severe Exposure


Part M - Approved

Wheelchair Friendly

Size	Aluminium	Gold	Black
914mm	19132	19126	19129
1219mm	19132/1	19126/1	19129/1

Threshex Sill

- For inward or outward opening doors.
- Under door clearance 14-17mm.
- The unique design of seal eliminates the need to rebate the bottom of the door.

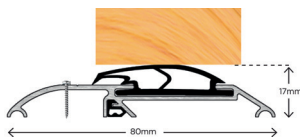

Wheelchair Friendly



Moderate Exposure




Part M - Approved

Size	Aluminium	Gold	Black
933mm	19060	19061	19062
1219mm	19063	19064	19065
2134mm	19066	19067	19068

Slimline Threshold

- For inward or outward opening doors.
- Under door clearance 18mm.
- Suitable for double doors.

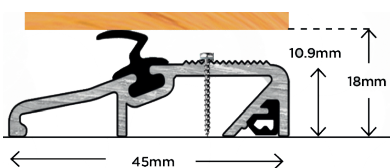

Wheelchair Friendly



Moderate Exposure




Part M - Approved

Size	Aluminium	Gold
914mm	19127	19127/G
1219mm	19128	19128/G

Kleertred 20

- For inward or outward opening doors.
- Under door clearance 20mm.

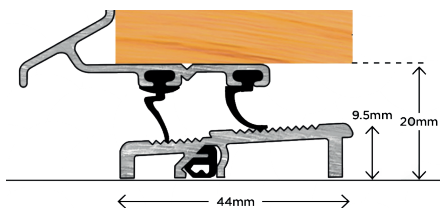

Wheelchair Friendly



Moderate Exposure




Part M - Approved

Size	Aluminium	Gold	Black
914mm	19100/20	19101/20	19102/20
1219mm	19103/20	19104/20	19105/20

Kleertred 25

- For inward or outward opening doors.
- Under door clearance 25mm.

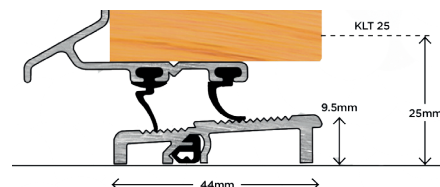

Wheelchair Friendly



Moderate Exposure




Part M - Approved

Size	Aluminium	Gold	Black
914mm	19100	19101	19102
1219mm	19103	19104	19105
2134mm	19105/L	19105/LB	19105/B

OUM 4 Threshold

- For outward opening doors.
- Under door clearance 12mm.
- Accepts MWK striker block for flush bolts in double doors.
- Ideal for double doors.

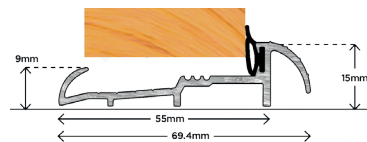

Wheelchair Friendly



Severe Exposure




Part M - Approved

Size	Aluminium	Gold	Black
914mm	19305	19304	19318
1219mm	19305/1	19304/1	19318/1
1829mm	19305/3	19304/3	19318/3
3000mm	19305/7	19304/5	19318/6

OUM 5 Threshold TB

- For outward opening doors.
- Thermally broken to prevent condensation.
- Under door clearance 15mm.
- Designed for doors 56mm+.
- Accepts MWK striker block for flush bolts in double doors.

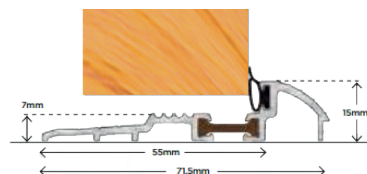

Wheelchair Friendly



Severe Exposure




Part M - Approved

Size	Aluminium	Gold	Black
1000mm	19120	19119	19118
3000mm	19120/1	19119/1	19118/1

OUM 6 Threshold

- For outward opening doors.
- Under door clearance 15mm.
- Designed for doors 56mm+.
- Accepts MWK striker block for flush bolts in double doors.

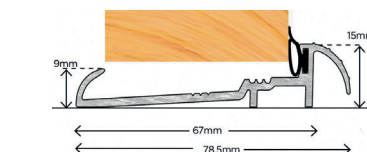

Wheelchair Friendly



Severe Exposure



Part M - Approved

Size	Aluminium	Gold	Black
914mm	19392	19393	19394
1219mm	19392/1	19393/1	19394/1
1829mm	19392/3	19393/3	19394/3
3000mm	19392/7	19393/5	19394/7

Exitex Stockist

We can supply Exitex's full range of weatherbars, door surrounds and DIY products.

If there is something you require that isn't in our brochure, or on our website, please contact us.


exitex™

Deflector 20

- For inward and outward opening doors.
- Easy to fit, just screw to the bottom of door.



Moderate Exposure

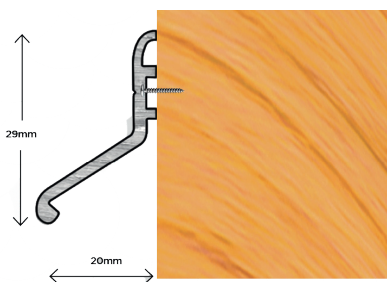


Size	Aluminium	Gold	Black
914mm	19069	19070	19071
1219mm	19072	19073	19074
2134mm	19075	19076	19077

Expelex Concealed Fix (With Seal)

- For inward and outward opening doors.
- No visible screws.
- Can be used in conjunction with a weatherbar.



Moderate Exposure

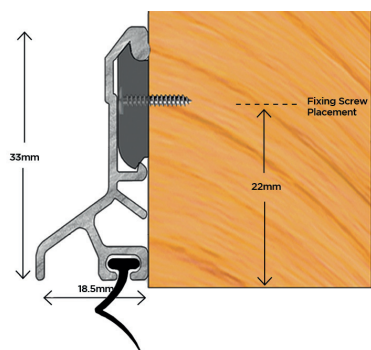


Size	Aluminium	Gold	Black
914mm	19113	19113/G	19113/BL

ERD Rain Deflector

- For inward and outward opening doors.
- Can be used in conjunction with a weatherbar.



Moderate Exposure

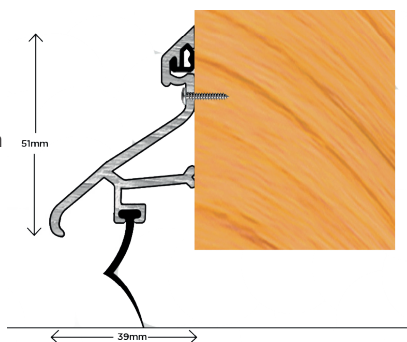


Size	Aluminium	Gold
914mm	19078	19078/1
1219mm	19400	19401

Flex 'n' Seal Door Surround

- For inward and outward opening doors and windows.
- Aluminium carrier with EPDM rubber seal.
- Allows for 5mm of door movement.
- Ready mitred corners.



Severe Exposure




Colour	Product Code
Aluminium	19106
Gold	19107
Black	19108
White	19108/W

Double Door Centre Seal

- Inward or outward opening double doors.
- Aluminium carrier with weather energised EPDM seal.



Severe Exposure



Colour	Product Code
Aluminium	19019
Gold	19020
Black	19023
White	19021
Brown	19022

IFS & GIFS Garage Door Seal - Aluminium

- For inward, outward or roller shutter doors.
- Suitable for steel, timber or composite doors.
- Under door clearance:
- IFS - 30mm.
- GIFS - 45mm.




Wheelchair Friendly



Moderate Exposure




Part M - Approved

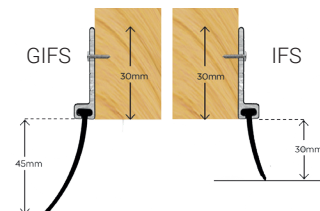

Type	Product Code
IFS (2134mm)	19079
GIFS (2134mm)	19080

Concealex A8100 - Aluminium


- Fire tested to BS EN 1634/1.
- Maximum drop 14mm.
- Seal: Co-extruded tubular seal in self-extinguishing TPE.
- Can be trimmed by 150mm.

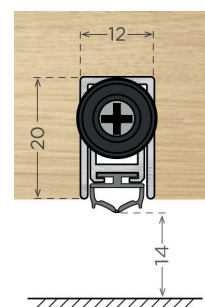

Size	Product Code
826mm	19195/5
926mm	19195/6
1026mm	19195/8

Concealex A8100 Superior

- Fire tested to BS EN 1634/1.
- Maximum drop 17mm.
- Seal: Sound insulating seal in self-extinguishing TPE.
- Can be trimmed by 150mm.

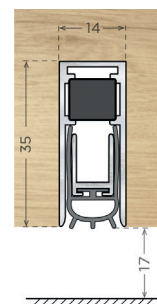


Size	Product Code
826mm	19196/5
926mm	19196/6
1026mm	19196/8

Standard Door Surround

- For inward and outward opening doors and windows.
- Aluminium carrier with a resilient TPE gasket.
- Mitred corners for perfect finish.



Severe Exposure



Colour	Product Code
Aluminium	19112/A
Gold	19112/G
Black	19112/B
White	19112/W

Brushstrip

- Hard wearing resilient polypropylene bristle stops draughts, dust, noise, etc.
- Adjusts to irregular gaps, can be used over carpets.
- Aluminium carrier with 18mm brush. (19109/Oak - 22mm brush).



Size	914mm	2135mm
Aluminium	19109/M	19110/M
Gold	19109/G	19110/G

Replacement Threshex Seal

- Ensure all dirt etc. is removed from channel before inserting new seal.
- Suits Threshex Sill.



Size	Product Code
1m	19060R
2m	19060L
4.5m	19060X

Replacement Seal for MDS Weatherbars

- Sold in metres.



Product Code
19218

Replacement Seal - Various


- Suits Double Sealing Sill, Macclex Sills, Slimline Threshold & Weatheren Lower.



Size	Code
Pre-cut 1m Length	19207
Per 1m Length (Up to 100m)	19207/1

Replacement Seal Various


- Suits Weatheren Upper & Kleertred.
- Sold in metres (Max 30m coil).



Product Code
19209

Replacement Seal for Garex, GIFS & Garin

- Sold in 3m lengths.



Product Code
19224

Replacement Seal MXS & OUM


- Suits Macclex & Oum Sills.
- Sold in metres (Max 30m coil).



Product Code
19215

Replacement Seal Expelex & Hi-per Bar


- Suits Expelex Deflector & Hi-per bar.
- Sold in metres (Max 30m coil).



Product Code
19208

MWK Block

- Accepts flush bolts for double doors.
- Supplied in 100mm lengths.

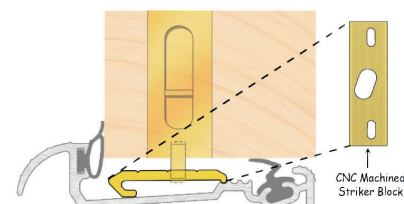

Colour	Machined	No Cut Out
Aluminium	19115	19206
Gold	19116	19206/1

Replacement Seal Various

- Suits MWK, IOS, OUM & SDS Sills.
- Sold in metres (Max 30m coil).



Product Code
19216

Replacement Seal for Weatherbars


- Suits Slimline, Kleertred, Macclex, Macclex Lowline, and Threshex.
- Sold in metres.



Product Code
19217

Striker Bolt Keep

- Optional shoot bolt keep.
- Can be used with MWK Striker Block or on it's own.



Product Code
19205