

Trend Tool Technology





TREND INFORMATION



- Full Trend product range is available, please contact us with your queries.
- Contact us for a PDF of the entire Trend catalogue.

ROUTER CUTTERS & SETS



JIGSAW, PLANER & SAWBLADES



POWER TOOLS, SAFETY & ROUTER TABLES



CNC SMART MACHINES & CNC MINI



WOODWORKING & ACCESSORIES



ROUTING JIGS & ACCESSORIES



SNAPPY QUICK RELEASE DRILL SYSTEM




Craft Straight Two Fluted Cutter

- Suitable for a wide range of applications such as engraving, grooving, rebating and shallow mortising.
- Use on softwoods, hardwoods, MDF, plywood and chipboard.
- All cutters have a bottom cut feature.
- D: Diameter •
- C: Cutter Length
- . OL: Overall Length

Trend Craft Range (\mathbf{C})

Shank ø	D mm	C mm	OL mm	Trend Code	Code
1⁄4″	2mm	5mm	55.5mm	C001CX1/4TC	26598
1⁄4″	3mm	9.5mm	56.5mm	C001AX1/4TC	26709
1⁄4″	3.2mm	9.5mm	60mm	C001X1/4TC	26599
1⁄4″	4mm	11.1mm	60mm	C002X1/4TC	26600
1⁄4″	5mm	16mm	71.5mm	C004X1/4TC	26710
1⁄4″	6mm	16mm	60mm	C005X1/4TC	26601
1⁄4″	6mm	20mm	64mm	C005BX1/4TC	26961
1⁄4″	6.3mm	19.1mm	62.5mm	C007X1/4TC	26602
1⁄4″	6.3mm	25.4mm	68.5mm	C008X1/4TC	26603
1⁄4"	7.1mm	19.1mm	61.5mm	C009X1/4TC	26604
1⁄4"	7.9mm	19.1mm	59.5mm	C011X1/4TC	26711
1⁄4″	8mm	25mm	68.5mm	C012AX1/4TC	26605
1⁄4"	9.5mm	38.8mm	72.5mm	C015X1/4TC	26606
1⁄4"	10mm	19.1mm	59.5mm	C016X1/4TC	26283
1/2"	10mm	19.1mm	63mm	C016X1/2TC	26607
1⁄4"	12mm	19.1mm	60mm	C019X1/4TC	26962
1⁄4"	12mm	19mm	71mm	C019AX1/4TC	26712
1⁄4″	12.7mm	31.8mm	72.5mm	C022X1/4TC	26608
1/2"	12.7mm	50mm	93.5mm	C153DX1/2TC	26286
1/2"	12.7mm	50mm	93.5mm	C153X1/2TC	26620
1/2"	12.7mm	50mm	93.5mm	CR/KFP/5 (PK 5)	26975
1⁄2"	12.7mm	63mm	105mm	C164X1/2TC	26621
1⁄4"	14mm	19mm	59.5mm	C023AX1/4TC	26277
1⁄2″	15.9mm	25.4mm	60mm	C026X1/2TC	26609
1⁄2″	18mm	25mm	67mm	C028AX1/2TC	26713
1⁄2"	19.1mm	25.4mm	64mm	C030X1/2TC	26610
1/2"	25.4mm	19.1mm	58mm	C033X1/2TC	26611





Pro Straight Two Fluted Cutter 💦 🚽 🗖							
 Tungsten Carbide Tipped for abrasive materials such as chipboard, MDF, plywood, hardwoods and hard plastics. Plunge compatible above 9.5mmØ. D: Diameter C: Cutter Length OL: Overall Length Professional Range 							
1	Shank ø	D mm	C mm	OL mm	Trend Code	Code	
	14" 14" 14" 14" 14" 14" 14" 14" 14" 14"	2.5mm 3mm 4mm 5mm 6mm 6.3mm 7mm 8mm 9mm 10mm 10mm 10mm 10mm 10mm 12mm 12mm 12mm 12mm 12mm 12mm 12mm 12mm	8mm 11mm 11mm 16mm 16mm 28mm 19mm 25mm 19mm 19mm 25mm 25mm 19mm 19mm 19mm 19mm 25mm 32mm 32mm 50mm	48mm 51mm 65mm 56mm 63mm 50mm 52mm 69mm 51mm 63mm 51mm 63mm 51mm 61mm 61mm 66mm 68mm 114mm 74mm	3/04X1/4TC 3/05X1/4TC 3/01X1/4TC 3/1X1/4TC 3/2X1/4TC 3/2X1/4TC 3/2X1/4TC 3/3X1/4TC 3/4X1/4TC 3/4X1/4TC 3/5X1/4TC 3/6X1/4TC 3/6X1/4TC 3/6X1/2TC 3/8X1/4TC 3/8X1/4TC 3/8X1/2TC 3/75X1/2TC 3/81X1/2TC 3/83DX1/2TC	26652 26653 26651 26654 26655	
	1/2" 1/2" 1/4" 1/2" 1/2"	12.7mm 12.7mm 15mm 15mm 15mm	50mm 63mm 25mm 25mm 35mm	108mm 115mm 57mm 67mm 76mm	3/83X1/2TC 3/85X1/2TC 4/1X1/4TC 4/1X1/2TC 4/04X1/2TC	26669 26945 26944 26672 26671	

421/35 Hinge Sinking 35mm ø ¼" D: 35mm. • OL . OL: 65mm. C Trend Craft Range D Shank Diameter **Product Code** 1/4" 26688 T420/35 Machine Bit

60mm

58mm

67mm

57mm

66mm

65mm

4/2X1/2TC

4/5X1/4TC

4/5X1/2TC

4/6X1/4TC

4/6X1/2TC

4/70X1/2TC

26673

26674

26675

26676

26677

26946

- Typically used for recessing circular hinges.
- Diameter: 35mm. .

1/2"

1⁄4″

1⁄2″

1⁄4″

1⁄2″

1⁄2″

16mm

19.1mm

19.1mm

20mm

20mm

25mm

19mm

25mm

25mm

25mm

25mm

25mm

OL: 57mm.

C Trend Craft Range


Shank Diameter 8mm

Product Code 26626

OL

CUTTERS

186

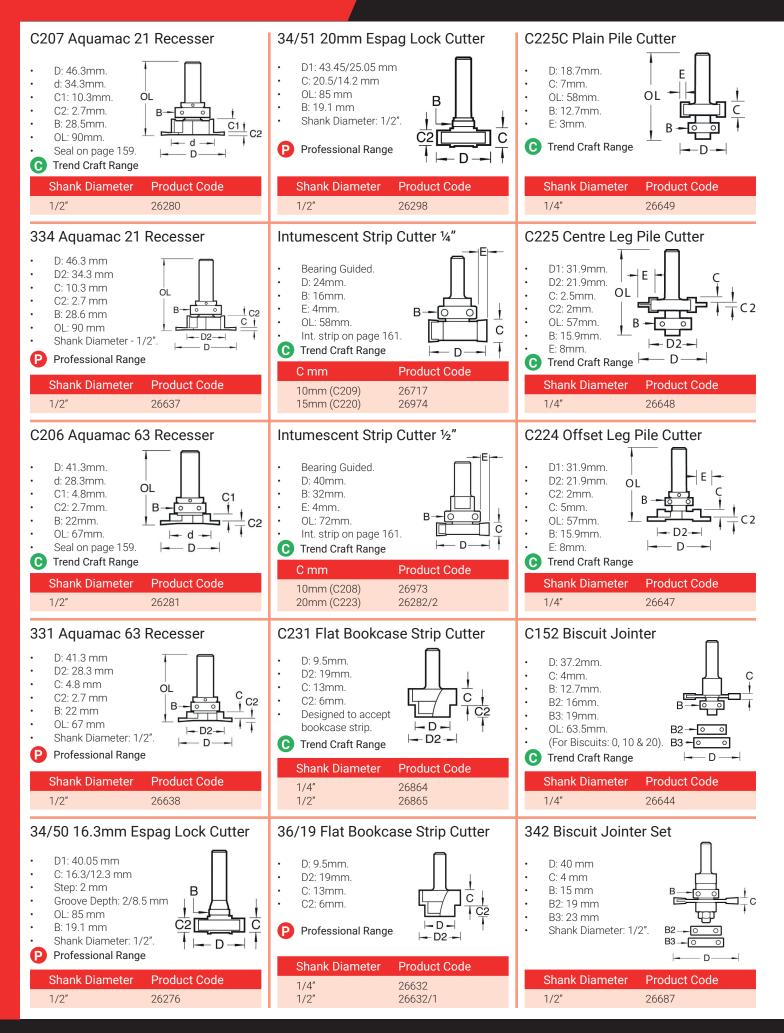

ROUTERS & ACCESSORIES

T4EK Router ¼" 850w Variable Speed 230v

- Versatile 1/4-inch plunge router.
- Variable speed control.
- Spindle lock.
- Hex collet nut allows easy cutter changes. 43mm diameter collar, removable base for
- carving, die grinding and pillar drill fitment. Tapped fixing holes for Trend standard guide bushes.

Product Code

26776

T7EK Router 1/2" 2100w Variable Speed 240v

- Soft start motor.
- Supplied with 1/2 inch collet and 1/4 inch reducing sleeve.
- Built in fine height adjustment.



Product Code

26883

T12EK Plunge Router 1/2" 2300w Var Speed 240v

- High-performance trade-focused plunge router with advanced safety features, engineered to deliver reliable, fast, accurate cuts.
- 80mm Plunge Depth.
- Precision Centring System.
- 7-Level Variable Speed Control ranges from 9,000 to 22,000rpm.

Product Code

26933

T14EK Workshop Router 1/2" 2300w Var Speed 240v

- Ideal for router tables, the workshop and on-site.
- 80mm Plunge Depth. Precision Centring System. 7-Level Variable Speed Control ranges from 9,000
- to 22,000rpm.
- Comes with router table safety switch.
- Extra wide 75mm base aperture.
- 2-in-1 Plunge and router table height adjuster.
- Router table cam-lock quick-release mounts.

Product Code

26934

R/POD/A Universal Router Safety Stand

- Ideal for use when cutter depth is set with a fine height adjuster.
- Rubber feet for anti slip.
- Stack double for extra long cutters.
- Prevents cutter damage to workbench.
- Made from ABS plastic.

Product Code

26871



Gauge/D60 Digital Depth Gauge

- For router tables and saw benches.
- Horizontal and vertical measuring.
- LCD readout for mm, imperial and fractions with auto shut off of five minutes.
- 60mm wide aperture.

Product Code

26579/1


D/LIFT/B Door & Board Lifter Swivel Type

- Allows movement in both axis for easy positioning and fixing of doors, panels and plasterboard.
- Foot operated.
- Lifts door 60mm (2-3/8 inch) high and maximum weight 75 kg (165 lbs).
- Made from metal with non marring foot pad

Product Code

26790

D/STAND/A Door Stand Holder





- Non-scratch base. Adjustable clamp for doors 32mm to 55mm thick.
- Allows door to be tilted back to assist fitting into frame.
- Maximum door weight 58kg.

Product Code

26750

TRENDICOTE Dry Lubricant PTFE Spray

- Dry lubricant spray to increase sawblade and router cutter life.
- Prevents build-up of resins on metal table surfaces, sawblades and metal tooling.
- Does not contain silicone.



Product Code

26584

TRENDIWAX Lubricant Wax Sticks 342g

- Extends sawblade life by keeping blade cool at cutting points.
- Low melting point solid lubricant for direct application to metal cutting tools, including saw blades and drills



Product Code

26764



KWJP Pro Multi-Material Worktop Jig	E/SCRIBE Scribing Tool			
 14 worktop functions. High pressure laminate. 5 inset cut depths. 26899 - 150 - 750mm. 26900 - 150 - 900mm. 	 Used for architrave, skirting and scribing doors and worktops, as well as setting hinge recess depth. Articulated arm allows the required offset to be set precisely from 1mm to 40mm. 			
Size Product Code 750mm (KWJ750P) 26899 900mm (KWJ900P) 26900	Product Code 26481			
KWJ900 Kitchen Worktop Jig 900mm	KWJ/OSD Worktop Jig Out Of Square Device			
 9 worktop functions. High pressure laminate. 	 Accessory for making angled worktop joints to accommodate out of square walls. Can be used for acute and obtuse wall angles up to 25 degrees out of square. Works with Trend KWJ Jigs and jigs up to 12mm thick. 			
Product Code	Product Code			
26295	26898			
H/JIG/C Two Part Skeleton Hinge Jig	KWJ/P/TCL Pro Jig Track Clamp (Pair)			
 Tradesman all in one worktop jig for up to 900mm wide worktops. Portable fully adjustable block template set designed for recessing hinges in wooden doors & frames using a plunge router. Fully adjustable apertures for fire door requirements and renovation work. 	 Special T Section for KWJ Pro Jigs & Track Saw Guides Steel Frame - Forged steel fixed arm for durability Adjustable Clamping Thickness - Clamps up to 160mm. 			
Product Code	Product Code			
26913	26907			
LOCK/JIG Lock Jig	UNIBASE 170mm x 8mm Router Base Adaptor			
 Interchangeable templates for use with a plunge router to cut the mortise & face-plate recess door locks. Up to 3 inch deep mortises & a 7/8 inch or 1 inch face-plate. Deeper mortises can be achieved with a suitable auger bit. 	 Enables routers with non-standard guide bush fittings to accept the range of Trend guide bushes, will fit to most routers. Suits collet sizes 1/4 inch, 8mm, 12mm and 1/2 inch. 			
Product Code	Product Code			
26296	26577			
C/CHISEL Corner Chisel	WP-HJ/09 Bradawl For Hinge/Jig			
 Ideal for squaring hinge recesses in door frames, door edges and lock faceplates. Spring loaded high speed steel (HSS) anvil for a sharp cut and longer life. 	Requires spacer.			
Product Code	Product Code			
0.675	0/7/5			

26765

MEASURING, MARKING & SNAPPY

