




The hinge requirement is determined by the weight and the shape of the door
 The table right gives you a guideline for 19 mm chipboard
 Doors must not be wider than they are high

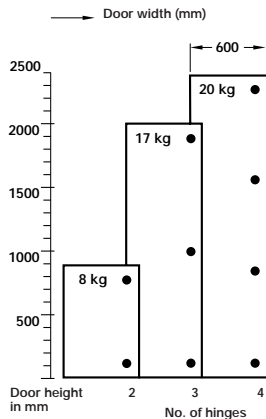


With Hospa Ø 3.5 mm raised head screws or press-fit version

Opening angle



With Hospa Ø 3.5 mm pan head screws

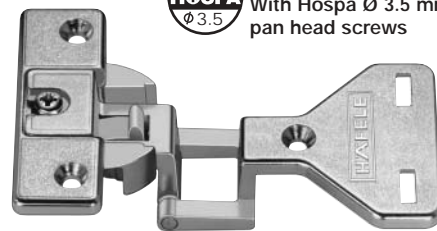


With pre-mounted expanding dowels and Hospa Ø 3.5 mm pan head screws



With pre-mounted Varianta Ø 5 mm screws




- **Regula hinges**
- For door thickness 16 to 20 mm
- With lateral adjustment up to 3 mm
- With vertical adjustment ± 2 mm
- With spring
- Nickel plated zinc alloy
- Opening angle 180°

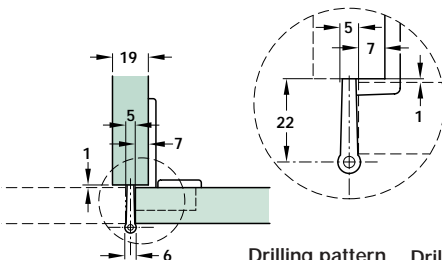

Drilling pattern for dowels or Varianta screws

Drilling pattern for Hospa screws

- **A Regula centre hinge with exposed axle**
- Centre panel mounting
- Door fixing: Hospa Ø 3.5 mm raised head countersunk screws
- Side panel fixing: Pre-mounted dowels and Hospa Ø 3.5 mm pan head screws, pre-mounted Varianta Ø 5 mm screws or Hospa Ø 3.5 mm pan head screws
- 7 mm door overlay

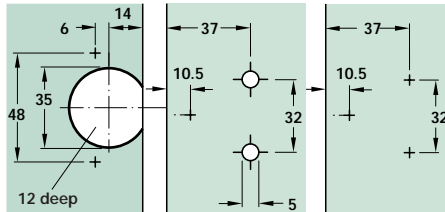


Discontinued •
Discontinued when stock = 0 +

A Regula centre hinge with exposed axle

Centre panel fixing	Cat. No.
Pre-mounted dowels and screws	344.21.021

Packing: 50 pcs

- **B Regula centre hinge with exposed axle**
- Centre panel mounting
- Door fixing: Press-fit
- Side panel fixing: Pre-mounted dowels and Hospa Ø 3.5 mm pan head screws, pre-mounted Varianta Ø 5 mm screws or Hospa Ø 3.5 mm pan head screws
- 7 mm door overlay

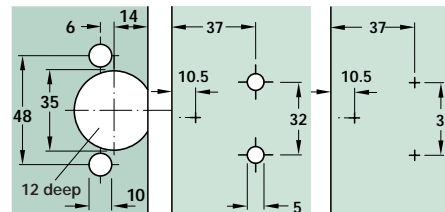


B Regula centre hinge with exposed axle

Centre panel fixing	Cat. No.
Pre-mounted dowels and screws	344.21.121

Packing: 50 pcs

- **C Regula centre hinge with exposed axle**
- Centre panel mounting
- Door fixing: Press-fit
- Side panel fixing: Pre-mounted dowels and Hospa Ø 3.5 mm pan head screws, pre-mounted Varianta Ø 5 mm screws or Hospa Ø 3.5 mm pan head screws
- 7 mm door overlay

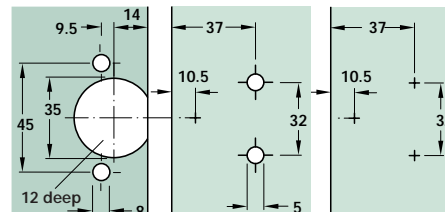


C Regula centre hinge with exposed axle

Centre panel fixing	Cat. No.
Pre-mounted dowels and screws	● 344.21.22T
Pre-mounted Varianta screws	● 344.21.21T
Hospa screws	344.21.201

Packing: 50 pcs

- **D Regula centre hinge with exposed axle**
- Centre panel mounting
- Door fixing: Press fit
- Side panel fixing: Pre-mounted dowels and Hospa Ø 3.5 mm pan head screws, pre-mounted Varianta Ø 5 mm screws or Hospa Ø 3.5 mm pan head screws
- 7 mm door overlay

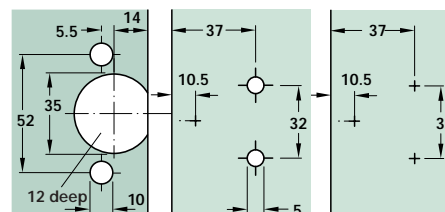

D Regula centre hinge with exposed axle

Centre panel fixing	Cat. No.
Pre-mounted dowels and screws	● 344.21.32T
Pre-mounted Varianta screws	● 344.21.31T
Hospa screws	344.21.301

Packing: 50 pcs

Mounting screws
 Hospa chipboard screws
 Pan head
 Ø 3.5 mm
 with cross slots



Finish: Zinc-plated steel

Length	Cat. No.
15 mm	015.71.633
17 mm	015.71.642
20 mm	015.71.651

Packing: 1000 pcs

Mounting screws
 Hospa chipboard screws
 raised head
 Ø 3.5 mm
 with cross slots



Finish: Nickel-plated steel

Length	Cat. No.
15 mm	015.55.639
17 mm	015.55.648
20 mm	015.55.657

Packing: 1000 pcs

09.06.06/3

3 Hinges with Exposed Axle