

Piccolo-Nova Espagnolette Lock Cases for Handles or Cylinders



HÄFELE

Dimensions in mm



Right hand shown

- **A** Piccolo-Nova lock cases
- With aperture for 7 mm square spindle
- Backset: 15 mm
- Left or right handed
- Plastic spindle aperture
- Matt nickel-plated zinc alloy lock case

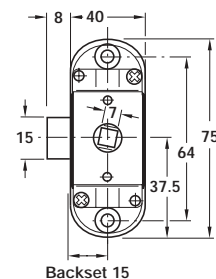

Espagnolette lock accessories for \varnothing 6 mm profile rod suitable for Piccolo-Nova are shown on pages 102-103

Discontinued •

Discontinued when stock = 0 +

A Piccolo-Nova lock cases

Zinc alloy	Left	Right
Finish	Cat. No.	
Matt nickel-plated	225.57.651	225.57.606



Packing: 10 pcs

Discontinued for 225.57.651 and 225.57.606 offer alternative 225.57.652



Right hand shown

- **B** Piccolo-Nova lock cases
- With aperture for 7 mm square spindle
- Backset: 25 mm
- Left or right handed
- Plastic spindle aperture
- Matt nickel-plated zinc alloy lock case

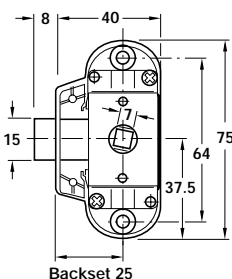



B Piccolo-Nova lock cases

Zinc alloy	Left	Right
Finish	Cat. No.	
Matt nickel-plated	225.57.660	225.57.615

Packing: 10 pcs




- **C** Lock rosettes, \varnothing 30 mm with adaptor
- For use with Piccolo-Nova lock cases with aperture for 7 mm square spindle
- For door thickness up to 30 mm
- Suitable lock handles to fit this rosette are shown on page 109
- Can be used with left or right handed locks
- Chrome-plated zinc alloy

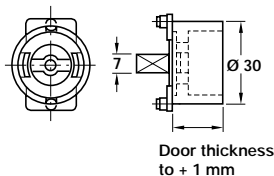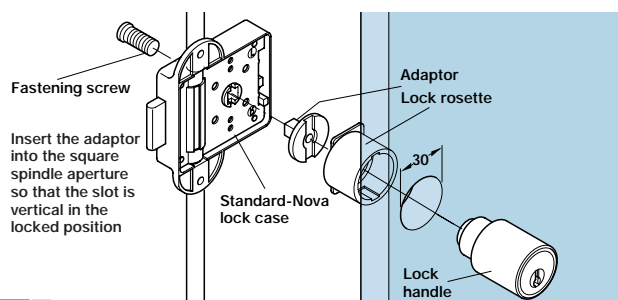


C Lock rosettes, \varnothing 30 mm with adaptor

For door thickness	Cat. No.
up to 20 mm	229.49.319
up to 25 mm	229.49.328
up to 30 mm	229.49.337

Packing: 1 pc




For handles or cylinders to fit these lock cases choose from the following:

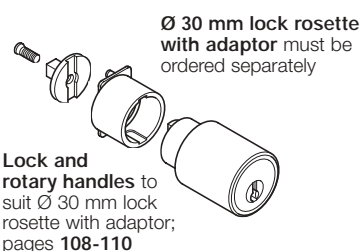


Lock and rotary handles to suit \varnothing 30 mm lock rosette with adaptor; pages 108-110

\varnothing 30 mm lock rosette with adaptor must be ordered separately



Lock and rotary handles with 7 mm square spindle; page 111



Variofitting knob mount with 7 mm square spindle, for fitting knobs provided by customer; page 110

12.04.06/3

We reserve the right to alter specifications without notice.