


- ***90° Closure direction:**
- **Closure directions** can be altered by re-positioning the cam, but always moving in the same direction:
 Closure direction **A** can be altered to **D, F or G**
 Closure direction **B** can be altered to **C, E or H**

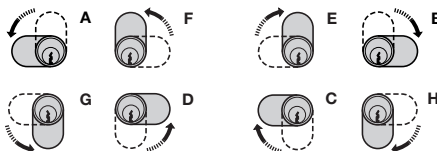

The locks can be operated by turning the protective cap with a screwdriver or coin, before the cylinder cores are installed

Cylinder housing

Protective cap

B Cam lock case

- For on-site installation of cylinder cores
- With **cranked cam**
- **Closure travel 90°, convertible***
- Steel
- **Accessories:** 1 locking cam, 1 mounting screw, 1 nut and 1 steel lock washer

| | | |
|------------------------|---------------------|---------------------|
| Closure direction | A (D, F, G*) | B (C, E, F*) |
| Polished nickel plated | 235.88.820 | 235.88.830 |

Order qty: 1 pc

