

### A Stainless steel hinge, thrust bearing


- High performance hinges
- Min. door thickness 40 mm
- Deep thrust bearing washers to each joint for high corrosion resistance
- Max. door weight 120 kg
- Fixing screws included
- Satin/polished stainless steel finish or high specification lacquered brass finish - salt water tested CP 240
- CE Conformat reference no. 1121
- Certifire approved



|                  |             |
|------------------|-------------|
| Length x width   | 102 x 76 mm |
| BS EN 1935 grade | 13          |
| Bronze plated    | 926.91.151  |

Order qty: 1 pc

Classification: 4 7 6 1 1 4 0 13

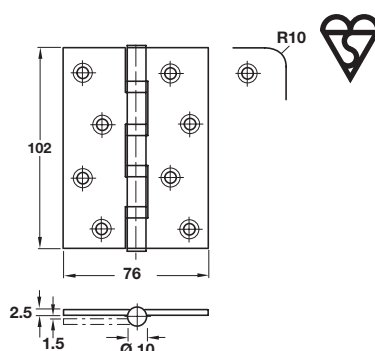


### B Anti-Ligature butt hinge

- 100 Kg capacity
- 2 ball bearing race joints
- 304 grade stainless steel
- Anti-ligature knuckle
- Fixing included
- Stainless steel

|                       |             |
|-----------------------|-------------|
| Length x width        | 102 x 76 mm |
| BS EN 1935 grade      | 12          |
| Satin stainless steel | 926.91.160  |

Order qty: 1 pc



### C Startec drill in hinge

- White galvanised
- Steel

|          |            |
|----------|------------|
| Cat. No. | 922.24.190 |
|----------|------------|

Order qty: 1 pc

