



- **Universal connector Maxifix**
- Individual connector to **drill in** for very strong connections with a high load capacity of wooden components, **minimum wood thickness of 24 mm**
- Wide range of applications
- Long tightening distance and rapid tightening with an allen key SW6 or cross slot PZ 3
- Can be tightened using an electric screw driver (bit allen key SW6 or cross slot PZ3)

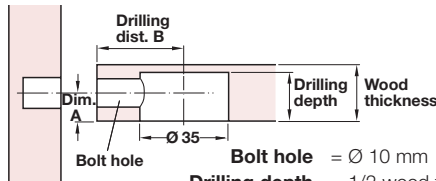

- Bolt hole** = Ø 10 mm
- Drilling depth** = 1/2 wood thickness + 7.5 mm^{+0.5}
- Distance A** = 1/2 wood thickness
- Drilling dist. B** = optional between **B 35** (35 mm) or **B 55** (55 mm), drilling distance from housing centre to panel front edge




A Maxifix housing

- Wide range of applications
- For wood thickness **from 24 mm**
- Drilling depth: 1/2 wood thickness + 7.5 mm
- Zinc alloy

Finish	SW 6	PZ 3
Nickel plated	262.86.703	262.86.713

Order qty: Multiples of 50 pcs



B Maxifix cover cap

- Plastic

Finish	Cat. No.
Brown	262.86.190
Black	262.86.390
White	262.86.790

Order qty: Multiples of 50 pcs




C Maxifix connecting bolt

- With M6 or M8 thread
- Screws into sleeve **D**
- Zinc plated steel

Drilling distance B	35 mm	55 mm
M6 thread	262.86.901	262.86.902
M8 thread	262.86.911	262.86.912

Order qty: Multiples of 50 pcs

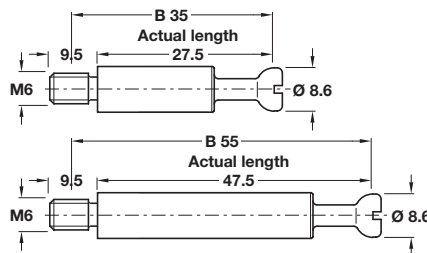

Important note:

Dimension **B** refers to drilling distance and not the length of the bolt



E Maxifix double-ended connecting bolt

- For double-sided installation through Ø 10 mm holes
- Zinc plated steel

Drilling distance B	35 mm
Cat. No.	262.86.921

Order qty: Multiples of 50 pcs

