

- **Regula hinges**
- For door thickness 16 to 20 mm
- With lateral adjustment up to 3 mm
- With vertical adjustment ± 2 mm
- With spring
- Nickel plated zinc alloy
- Opening angle **180°**


**Catalogue shows 180°
Correct opening angle is 240°**



With Hospa $\varnothing 3.5$ raised head screws or press-fit version




With Hospa $\varnothing 3.5$ pan head screws

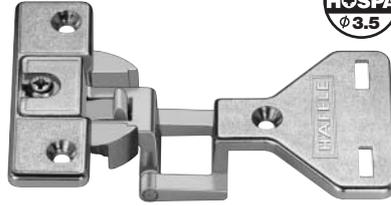

With pre-mounted Varianta $\varnothing 5$ screws




240°

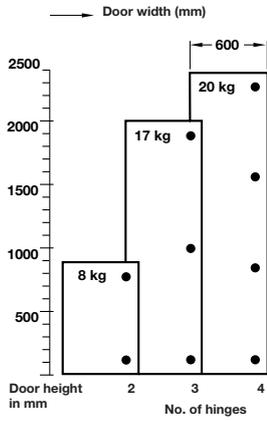

The hinge requirement is determined by the weight and the shape of the door

The table above gives you a guideline for 19 mm chipboard

Doors must not be wider than they are high

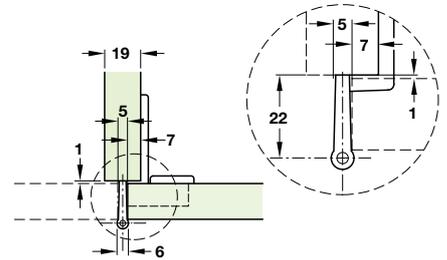

B Regula centre hinge with exposed axle

- Centre panel mounting
- Door fixing: Press-fit
- Side panel fixing: Pre-mounted Varianta $\varnothing 5$ screws or Hospa $\varnothing 3.5$ pan head screws
- 7 mm door overlay

Centre panel fixing	Cat. No.
Pre-mounted Varianta screws	344.21.111
Hospa screws	344.21.101

Order qty: 1 pc

