



Router OF 1400 EBQ Plus


Alternative Festool router also available:
002.15.082 (240V)
002.15.083 (110V)
Please contact us for further information

OF 2200 EB-Plus router

- Top power development and fully variable speed for hard materials and increased material thicknesses
- Precise work with little effort thanks to a guide bar support offset by 30°
- Tool-free copying ring and base-runner change
- Fast, convenient router-bit change with rocker and ratchet principle
- Greater precision through extreme torsional rigidity thanks to double guide column clamp
- Simple and exact routing depth setting to 1/10 mm
- Fast profile cutter adjustment through coupleable/decoupleable base plate
- Dust extraction of up to 99% during edge routing through adjustable extraction ring and chip catcher
- Supplied with Ø 8 mm clamping collet, Ø 12 mm clamping collet, Ø 30 mm copying ring, chip deflector, operating tool, systainer

Voltage	Cat. No.
240V	002.15.003
110V	002.15.004

Order qty: 1 pc

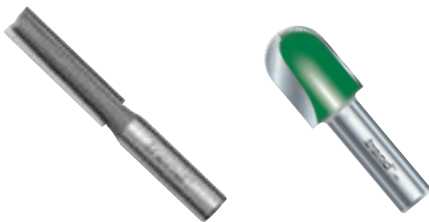

Cutters

- Router cutter: Shaft Ø: 1/2"/12.7 mm. Tungsten carbide tipped.
- Draining board cutter: For routing sloping drainage grooves in a natural wood or stone worktop. Use with sloping drainer jig 002.21.501. Shaft Ø: 1/2"/12.7 mm. Solid tungsten carbide.

Cutter	Cat. No.
Router cutter	002.11.610
Draining board cutter	002.15.767

Order qty: 1 pc



Festool Rotex RO 150 FEQ eccentric sander

- Coarse sander, fine sander and polisher in one tool
- Push-button switching between eccentric sanding (for scratch-free fine sanding) and random-curve sanding (for high abrasion when coarse sanding or for polishing)
- Electronic: continuously variable speed and stroke
- Smooth running
- Optimised dust extraction means longer life for abrasive discs
- Brake prevents excess speed in no-load condition
- Anti-static function
- Supplied with Systainer case, Stickfix sanding pad, Ø 150 mm (soft), Stickfix abrasive disc, Rotex protector and operating tool

Voltage	Cat. No.
240V	005.11.370
110V	005.11.371

Order qty: 1 pc



Festool TS 55 circular saw

- Plunge saw for accuracy with plunge-cut principle
- Viewing window and plunge marking for exact cut lengths
- Electronic control with 6 regulating and controlling functions
- Constant speed also with heavy-duty applications
- Straight cuts due to precise guidance and patented swivel unit
- Tear-free and clean cuts with splinter guard
- Quick work preparation as the guide rail edge is also the cut edge
- Very safe due to quick-acting safety brake
- Non-tiring work due to ergonomically designed grip
- Available with or without FS 1400 guide rail
- Supplied with Systainer case, HW fine-tooth saw blade, Z48, chip deflector and operation tool

Voltage	Cat. No.
240V EBQ, with FS 1400 guide rail	000.49.227

Order qty: 1 pc

Tools - for further information on these tools or for details of our complete range please contact us or visit www.hafele.co.uk

KC 2009, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.