

### Support for worktop

- Supports worktop depth 600-620 mm
- Dims (HxWxD): 50 x 495 x 50 mm
- Painted steel



Finish	Cat. No.
White	506.16.740

Order qty: 1 pc

### Winding handle

- Includes transmission
- Aluminium



Finish	Cat. No.
Aluminium	506.16.950

Order qty: 1 pc

### Motor and control box

- For electric adjustment of worktop system
- Motor, includes 2000 mm cable
- Control box, for 1 or 2 motors, includes control switch and cables



Item	Cat. No.
Motor	506.16.360
Control box for 1 motor	506.16.364
Control box for 2 motor	506.16.361

Order qty: 1 pc



### Control switch

For adjustment of worktop and cupboard height.

Included with control box.

Buttons are easy to read and operate.

### Flexible safety strip

- For worktop system and adjustable table frame shown on page 212
- Automatic safety stop to ensure that nothing gets crushed beneath worktop fascia
- Allow sufficient for fascia front and returns in one piece. Do not cut. Excess can be hidden below worktop
- **Note:** This safety strip must be used with all electric worktop systems



Length (including cable length)	Cat. No.
1600 mm (1000 mm)	506.17.921
2400 mm (1000 mm)	506.17.922
3200 mm (1500 mm)	506.17.923
4200 mm (1500 mm)	506.17.924

Order qty: 1 pc

### Accessories and spares for worktop system


- Spare control switch, includes 1600 mm cable, black plastic
- Large press pad, alternative to control switch, has a large (70 x 140 mm) surface area for easier use, 7 pin, white plastic
- Connecting bush, for cut rods when converting manual to electric
- Flexible plumbing kit, 1200 mm flexible waste pipe, 250 mm waste elbow including trap and 2 flexible 1 m feed pipes

Item	Cat. No.
Control switch	506.16.363
Large press pad	506.16.764
Connecting bush	506.16.362
Flexible plumbing kit	506.16.365

Order qty: 1 pc

### FlexiCorner -

- Ideal for single person use of the kitchen.
- Economical alternative to two separate Flexi frames (two separate Flexi frames in a corner would allow for two people to work at different heights - the corner frame suits just one person)
- The hob, sink and preparation area can all be adjusted in one movement.
- Useful if space is limited by maximising the corner area.
- Max. load of frame is **150 kg** evenly distributed over the entire frame.

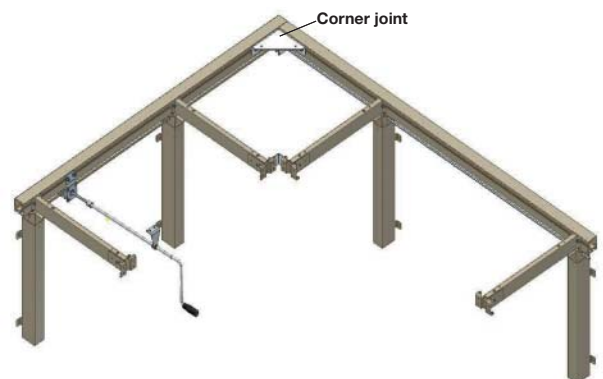

### Flexi Corner set

- For use with Flexi Manual or electric frames
- Frame height adjustable from 650-950 mm
- Not suitable for use with FlexiBasic
- For 850-2450 mm frame width
- Comprises:  
2 x corner joints (for profiles and support arms) and a corner transmission

#### Order separately:

4 x legs 506.16.730

Required number of support arms 506.16.740

**For manual version** order separately:

1 x winding handle 506.16.950

1 x wall bar profile and spindle 506.16.00X

**For electric version** order separately:

1 x 2 motor control box 506.16.36X

2 x motors 506.16.360

1 x safety strip 506.17.92X

- White painted steel

	Cat. No.
Flexi corner set	506.16.770

Order qty: 1 set

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.