

Ventilation grill

- For recess mounting
- Height 65 mm, recessed height 55 mm
- Suitable for wood thicknesses 10-20 mm
- To install, the grill is simply inserted into the pre-cut aperture and secured from the rear with fastening clips which can be adjusted to the thickness of the wood
- With flanged rim
- Plastic


Length	458 mm
Recessed length	448 mm
Ventilation area	over 200 cm²
White	571.77.705
Brown	571.77.107
Black	571.77.300
Grey	571.77.500
Matt silver coloured	571.77.900
Polished chrome-plated	571.77.200

Order qty: 1 pc




Ventilation grill

- For recess mounting
- Height 83 mm, recessed height 72 mm
- Suitable for wood thicknesses 10-20 mm
- To install, the grill is simply inserted into the pre-cut aperture and secured from the rear with fastening clips which can be adjusted to the thickness of the wood
- With flanged rim
- Plastic



Length	400 mm
Recessed length	398 mm
Ventilation area	over 200 cm²
White	571.78.702
Brown	571.78.104

Order qty: 1 pc




Ventilation grill

- For fitting into top of plinths, recess mounting
- Height 79 mm
- For 16 mm board thickness
- Press clip fitting
- With flanged rim
- Plastic

Length	367 mm
Recessed length	355 mm
Beige	559.99.450
White	559.99.750
Brown	559.99.150
Stainless steel	559.99.050

Order qty: 1 pc

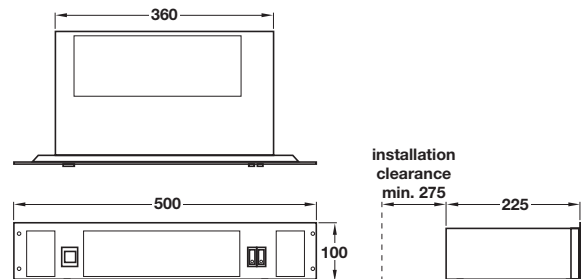

Plinth heater

- For minimum plinth height 100 mm
- 2kW model
- With variable heat settings and fan only setting for air circulation in warm weather
- Kick switch for turning on or off
- Automatic safety cut-out
- Fitted with 2.2 m mains lead, bare ended

Finish	Cat. No.
Stainless steel	565.29.000

Order qty: 1 pc

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.