


# Fixing Materials

## Countersunk Head Hospa Screws

- Please order screws in multiples of order quantity shown


Hospa thread Ø	Drive required
2.5 - 3.0 mm	PZ1
3.5 - 5.0 mm	PZ2
6.0 mm	PZ3



### C Hospa screw, countersunk head

- **Nickel-plated steel**
- Fully threaded
- Countersunk head with PZ cross slot
- For use with PZ bits, see table above

Øx	Length	Cat. No.	Order Qty
2.5x	16 mm	015.35.253	1000
3.5x	15 mm	015.35.637	1000
3.5x	17 mm	015.35.646	1000
3.5x	20 mm	015.35.655	1000
4.0x	15 mm	015.35.824	1000
4.0x	17 mm	015.35.833	1000
4.0x	20 mm	015.35.842	1000




### D Hospa screw, countersunk head

- **Bronzed steel**
- Fully threaded
- Countersunk head with PZ cross slot
- For use with PZ bits, see table above

Øx	Length	Cat. No.	Order Qty
3.0x	15 mm	015.39.537	1000
3.0x	17 mm	015.39.546	1000
3.0x	20 mm	015.39.555	1000
3.0x	25 mm	015.39.573	1000
3.5x	15 mm	015.39.635	1000
3.5x	17 mm	015.39.644	1000
3.5x	20 mm	015.39.653	1000
3.5x	25 mm	015.39.671	1000
3.5x	30 mm	015.39.680	1000
4.0x	17 mm	015.39.831	1000
4.0x	20 mm	015.39.840	1000
4.0x	25 mm	015.39.859	1000
4.0x	30 mm	015.39.868	1000
4.0x	35 mm	015.39.877	500
4.0x	40 mm	015.39.886	500
4.5x	25 mm	015.39.939	1000
4.5x	30 mm	015.39.948	1000


- **Hospa screws partially threaded**
- Ideally suited for wood to wood joints in that any gap is eliminated

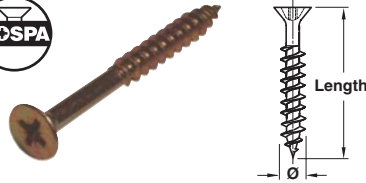

### E Hospa screw, partially threaded

- **Yellow chromated steel**
- Partially threaded
- Countersunk head with PZ cross slot
- For use with PZ bits, see table left


Øx	Length	Cat. No.	Order Qty
3.0x	25 mm	015.43.577	1000
3.0x	30 mm	015.43.586	1000
4.0x	35 mm	015.43.871	500
4.0x	40 mm	015.43.880	500
4.0x	50 mm	015.43.906	500
4.0x	60 mm	015.43.924	200
4.0x	70 mm	015.43.933	200
4.5x	40 mm	015.43.960	500
4.5x	50 mm	015.43.988	200
4.5x	60 mm	015.44.001	200
4.5x	70 mm	015.44.038	200
4.5x	80 mm	015.44.047	200
5.0x	50 mm	015.44.136	200
5.0x	60 mm	015.44.145	200
5.0x	70 mm	015.44.163	200
5.0x	80 mm	015.44.172	100
5.0x	90 mm	015.44.181	100
5.0x	100 mm	015.44.190	100
6.0x	50 mm	015.44.341	200
6.0x	60 mm	015.44.350	200
6.0x	70 mm	015.44.369	100
6.0x	80 mm	015.44.378	100
6.0x	90 mm	015.44.387	100
6.0x	100 mm	015.44.396	100
6.0x	120 mm	015.44.412	100
6.0x	140 mm	015.44.430	100
6.0x	160 mm	015.44.458	100

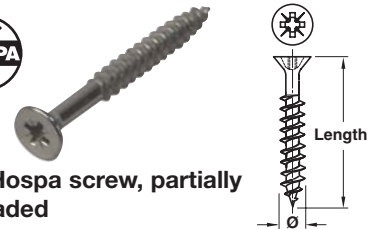

### F Hospa screw, partially threaded

- **Zinc-plated steel**
- Partially threaded
- Countersunk head with PZ cross slot
- For use with PZ bits, see table left

Øx	Length	Cat. No.	Order Qty
3.0x	30 mm	015.41.582	1000
4.0x	35 mm	015.41.877	500
4.0x	40 mm	015.41.886	500
4.0x	50 mm	015.41.902	500
4.0x	60 mm	015.41.920	200
4.0x	70 mm	015.41.939	200
4.5x	40 mm	015.41.966	500
4.5x	50 mm	015.41.984	200
4.5x	60 mm	015.42.007	200
4.5x	70 mm	015.42.034	200
4.5x	80 mm	015.42.043	200
5.0x	50 mm	015.42.132	200
5.0x	60 mm	015.42.141	200
5.0x	70 mm	015.42.169	200
5.0x	80 mm	015.42.178	100
5.0x	90 mm	015.42.187	100
5.0x	100 mm	015.42.196	100
6.0x	50 mm	015.42.347	200
6.0x	60 mm	015.42.356	200
6.0x	70 mm	015.42.365	100
6.0x	80 mm	015.42.374	100
6.0x	90 mm	015.42.383	100
6.0x	100 mm	015.42.392	100
6.0x	120 mm	015.42.418	100
6.0x	140 mm	015.42.436	100
6.0x	160 mm	015.42.454	100
6.0x	180 mm	015.42.472	100

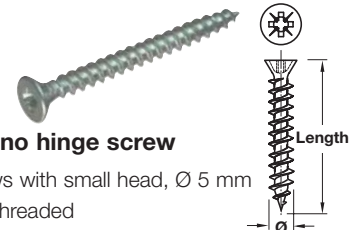

### G Piano hinge screw

- Screws with small head, Ø 5 mm
- Fully threaded
- Countersunk head with PZ cross slot
- Zinc-plated, yellow chromated or nickel-plated steel
- For use with PZ bits, see table above left

Øx	Length	Cat. No.	Order Qty
<b>Zinc-plated</b>			
3.0x	13 mm	015.31.326	1000
3.0x	15 mm	015.31.335	1000
3.0x	17 mm	015.31.344	1000
<b>Yellow chromated</b>			
3.0x	13 mm	015.33.320	1000
3.0x	15 mm	015.33.339	1000
3.0x	17 mm	015.33.348	1000
<b>Nickel-plated</b>			
3.0x	15 mm	015.35.333	1000