


- **Minifix 15 metal housings** with and without rim
- **Minifix 15 connecting bolts**, suitable for these zinc alloy housings are shown on pages **16-24**
- **Unitool drilling jig** for Minifix 12 and 15 housings can be found on page **9**
- **Variantool-N drilling jig** for drilling series-drilled holes for connecting bolts shown on page **41**
- **Minifix 15 polycarbonate housings** shown on pages **14-15**

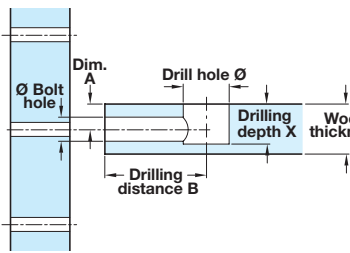

- Drill hole Ø** = Ø 15 mm for housings
- Drilling depth X** = depends on type of housing and wood thickness (see order columns for details)
- Drilling distance B** = choice of B 24 (24 mm) or B 34 (34 mm) drilling distance from drill-hole centre to panel front edge
- Bolt drill hole Ø** = Ø 5 or Ø 8 mm in panel front edge according to choice of connecting bolt

Note: *Brightened finish = similar to nickel-plated finish in appearance but does not contain Chrome 6


Discontinued ●
Discontinued when stock = 0 +

A Minifix 15 housing without rim

- For wood thicknesses from 13 or 15 mm
- Drive: PZ2 cross slot, flat blade or tightening key
- Minifix 15 housing for 13 and 15 mm wood thicknesses cannot be tightened using an allen key. Order tightening key **D** separately
- Zinc alloy

For wood thickness from	Dim. A	Drilling depth X	Cat. No.			
			Bright	Nickel-plated	Black	Brightened*
13 mm	6.5 mm	11.0 ^{+0.2} mm	262.26.071	262.26.571	262.26.371	-
15 mm	7.5 mm	12.0 ^{+0.5} mm	● 262.26.072	● 262.26.572	262.26.372	262.26.172

Order qty: 100 pcs




B Minifix 15 housing without rim

- For wood thicknesses from 15 and 16 mm
- Drive: PZ2 cross slot, flat blade, SW4 hexagon socket or tightening key
- Zinc alloy

For wood thickness from	Dim. A	Drilling depth X	Cat. No.			
			Bright	Nickel-plated	Black	Brightened*
15 (16)	7.5 (8) mm	12.0 ^{+0.5} mm	262.26.043	262.26.543	262.26.343	262.26.143

Order qty: Multiples of 100 pcs




C Minifix 15 housing without rim

- For wood thicknesses from 16, 18 or 19 mm
- Drive: PZ2 cross slot, flat blade, SW4 hexagon socket or tightening key
- Zinc alloy

For wood thickness from	Dim. A	Drilling depth X	Cat. No.			
			Bright	Nickel-plated	Black	Brightened*
16 mm	8.0 mm	12.5 ^{+0.5} mm	● 262.26.073	262.26.573	262.26.373	262.26.173
18 mm	9.0 mm	13.5 ^{+0.5} mm	262.26.064	262.26.574	262.26.374	262.26.174
19 mm	9.5 mm	14.0 ^{+0.5} mm	262.26.075	262.26.575	262.26.375	262.26.175

Order qty: Multiples of 100 pcs



D Tightening key

- For self-assembly furniture using zinc alloy Minifix housings
- Galvanized steel

	Cat. No.
Tightening key	006.36.911

Order qty: 1 pc

All three ends can be used for tightening

