



90° Closure directions

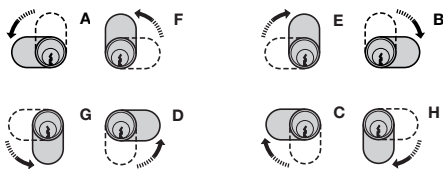

- ***90° Closure direction:**
- **Closure directions** can be altered by re-positioning the cam, but always moving in the same direction: Closure direction **A** can be altered to **D, F or G**
Closure direction **B** can be altered to **C, E or H**

Anti-twist washer and spacer bushes are shown on page 137

Right hand, direction A version shown

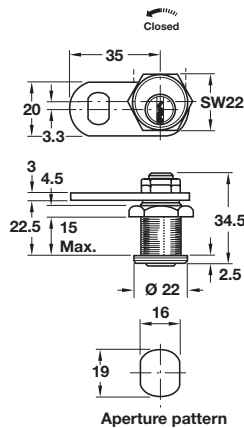

A Cylinder cam lock, 15 mm thread max.


- With **straight cam** and nut attachment
- Closure travel **90°**
- **With key trap;** key can only be removed in locked position
- **5 pairs of pin tumblers** = 10,000 possible key changes
- Bright brass nut, galvanized steel nuts and cam
- Polished nickel-plated brass cylinder
- **Accessories:** 2x keys, 1x locking cam, 3x nuts and 1x washer
- **Spacer bushes** and **anti-twist washer**, where necessary, must be ordered separately
- ***Master key and general master key systems:** Please discuss with our Sales staff before ordering, state closure direction required

Random key changes

Closure direction		
	90° A (D,F,G)	90° B (C,E,H)
Cat. No.	235.91.719	
Keyed alike: Key change H1		
Closure direction		
	90° A (D,F,G)	90° B (C,E,H)
Cat. No.	235.91.817	235.91.826

Order qty: 1 pc

With master key system:*	
Cat. No.	235.91.898
With general master key system:*	
Cat. No.	235.91.899

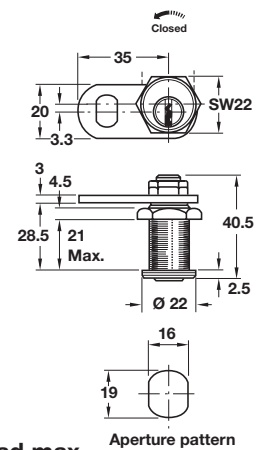

B Cylinder cam lock, 21 mm thread max.

- With **straight cam** and nut attachment
- Closure travel **90°**
- **With key trap;** key can only be removed in locked position
- **5 pairs of pin tumblers** = 10,000 possible different key changes
- Bright brass nut, galvanized steel nuts and lever
- Polished nickel-plated brass cylinder
- **Accessories:** 2x keys, 1x locking cam, 3x nuts and 1x washer
- **Spacer bushes** and **anti-twist washers**, where necessary, must be ordered separately
- ***Master key and general master key systems:** Please discuss with our Sales staff when ordering, state closure direction required

Random key changes

Closure direction		
	90° A (D,F,G)	90° B (C,E,H)
Cat. No.	235.92.716	235.92.725
Keyed alike: Key change H1		
Closure direction		
	90° A (D,F,G)	90° B (C,E,H)
Cat. No.	235.92.814	235.92.823


Order qty: 1 pc

With master key system:*

Cat. No.	235.92.898
With general master key system:*	
Cat. No.	235.92.899

C Anti-twist washer

- For use with cylinder cam locks **A** and **B**
- Steel




Finish	Cat. No.
Galvanized	235.91.906

Order qty: Multiples of 10 pcs

D Spacer bush

- For use with cylinder cam locks **A** and **B**
- Polished nickel-plated brass



Thickness	2.5 mm	3.5 mm	6.0 mm
Cat. No.	235.91.915	235.91.924	235.91.933

Order qty: Multiples of 10 pcs