


- Minifix connecting bolts **A**, **B** and **C** can be screwed directly into a  $\varnothing 5$  mm pre-drilled hole. For single and doubled-sided constructions.
- Minifix connecting bolts **D** with M6 thread are used in conjunction with sleeves or dowels for installation in  $\varnothing 8$  mm or  $\varnothing 10$  mm pre-drilled holes. For single-sided constructions



**= Cross slot**  
Tighten with PZ2 screwdriver only (cross-slot size 2)



**= Combination slot**  
Tighten with a PZ2 screwdriver or flat bladed screwdriver

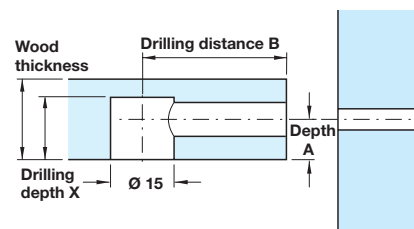


### A Connecting bolt

- For direct, screw-in installation in  $\varnothing 5$  mm holes
- Steel

Drilling distance B	24 mm	34 mm
Bright	262.27.611	262.28.611
Galvanized	262.27.618	262.28.618

Order qty: Multiples of 100 pcs




### B Connecting bolt

- For direct, screw-in installation in  $\varnothing 5$  mm holes
- With special thread
- Steel

Drilling distance B	24 mm	34 mm
Galvanized	262.27.627	262.28.624

Order qty: Multiples of 100 pcs




### C Connecting bolt

- With M6 thread, for screwing into sleeves or dowels for installation in  $\varnothing 8$  mm or  $\varnothing 10$  mm holes, shown on page 20
- Steel

Drilling distance B	34 mm
Galvanized	262.28.642

Order qty: Multiples of 100 pcs



TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.