




- **Minifix connecting bolts A** with special thread can be screwed directly into a **Ø 3 mm** pre-drilled hole or can be used in conjunction with dowel **B** which is pressed into a **Ø 5 mm** pre-drilled hole
- **Minifix connecting bolts C** and **D** with special threads can be screwed directly into a **Ø 5 mm** pre-drilled hole
- For single or double-sided constructions

 = **Cross slot**
Tighten with PZ2 screwdriver only (cross-slot size 2)

 = **Combination slot**
Tighten with a PZ2 screwdriver or flat bladed screwdriver

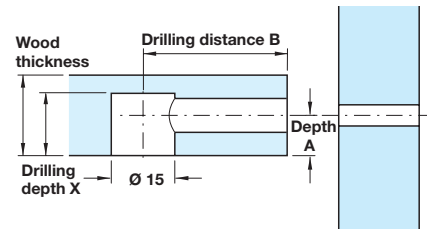


A Connecting bolt

- For direct, screw-in installation in **Ø 3 mm** holes or for press-fit installation in **Ø 5 mm** holes when used with dowel **B**
- With special thread
- Steel

Drilling distance B	24 mm	34 mm
Bright	262.27.010	262.28.017
Galvanized	262.27.912	262.28.919

Order qty: Multiples of 100 pcs

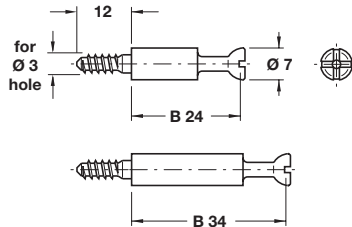


B Strip of expanding sleeves

- For **Ø 5 mm** holes
- Will accept connecting bolts with special thread **A**
- Integrally injection moulded sleeves
- Natural coloured nylon

Strip qty	Cat. No.
20 sleeves	042.98.051

Order qty: Multiples of 100 pcs (= 50 strips)




C Connecting bolt

- For direct, screw-in installation in **Ø 5 mm** holes
- With special thread
- Steel

Drilling distance B	24 mm	34 mm
Galvanized	262.27.309	262.28.309

Order qty: Multiples of 100 pcs

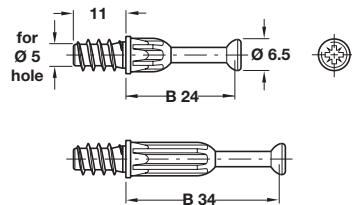

D Connecting bolt

- For direct, screw-in installation in **Ø 5 mm** holes
- With special thread
- Steel

Drilling distance B	24 mm	34 mm
Thread length 8 mm		
Bright	262.27.020	262.28.020
Galvanized	262.27.920	262.28.920
Thread length 10 mm		
Bright	-	262.28.008
Thread length 11 mm		
Bright	262.27.029	262.28.026
Galvanized	262.27.921	262.28.928
Thread length 15 mm		
Bright	262.27.234	262.28.231
Galvanized	262.27.832	262.28.839

Order qty: Multiples of 100 pcs

