

### Minifix GV mitre joint connectors

- Connectors to secure mitre-jointed cabinet and profiles without the need for gluing
- Combine knock-down convenience with extreme stability on assembly
- These connectors should preferably be used only in combination with Minifix 15 zinc alloy housings shown on pages 10-11



Minifix GV mitre joint connector **D** can be used for any angle joint from 90° to 180°

Ø 7, Ø 8 or  
Ø 10 mm




#### A Minifix GV mitre joint connector

- With nylon sleeve with harpoon thread, press-fits into Ø 8 mm holes
- For any angle from 30° to 180°
- Steel

Drilling distance B	24 mm	44 mm
Galvanized	262.12.822	262.12.804

Order qty: Multiples of 100 pcs

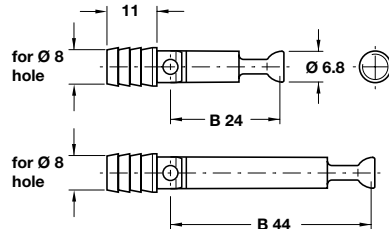


#### B Minifix GV mitre joint connector

- With nylon sleeve with harpoon thread, press-fits into Ø 10 mm holes
- For any angle from 30° to 180°
- Steel

Drilling distance B	44 mm
Galvanized	262.12.813

Order qty: Multiples of 100 pcs

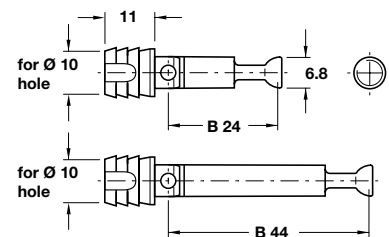


#### C Minifix GV mitre joint connector

- With M6 thread, for screwing into sleeves or dowels, for installation in Ø 8 mm or Ø 10 mm holes
- Sleeves and dowels to suit M6 thread are shown on page 19
- For any angle from 30° to 180°
- Steel

Drilling distance B	24 mm	44 mm
Galvanized	262.12.840	262.12.984

Order qty: Multiples of 100 pcs

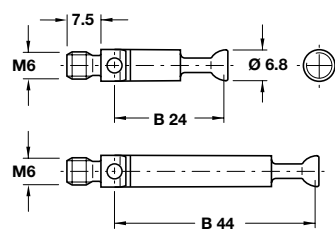

#### D Minifix GV mitre joint connector

- Double-ended hinged bolt for installation in Ø 7 mm holes
- For double-sided constructions
- For any angle from 90° to 180°
- Steel

Drilling distance B	24 mm	44 mm
Galvanized	262.12.859	262.12.939

Order qty: Multiples of 100 pcs

