


A Glass shelf support, plug in

- For $\varnothing 5$ mm hole
- For 6/8/10 mm glass thickness
- Zinc alloy with transparent plastic glass support

Finish	Cat. No.
Nickel-plated	282.13.711

Order qty: Multiples of 10 pcs

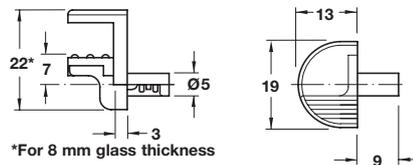


B Glass shelf support, plug in

- For $\varnothing 5$ mm hole
- For 8/10/12 mm glass thickness
- Zinc alloy with transparent plastic glass support

Finish	Cat. No.
Nickel-plated	282.13.712

Order qty: Multiples of 10 pcs




C Glass shelf support, screw fixing

- For $\varnothing 3/5$ mm hole
- For 6/8/10 mm glass thickness
- Zinc alloy with transparent plastic glass support
- Order **fastening materials** separately

Finish	Cat. No.
Nickel-plated	282.13.701

Order qty: Multiples of 10 pcs

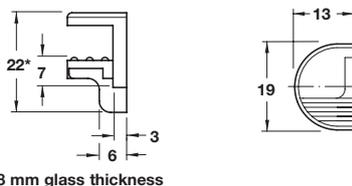


D Glass shelf support, screw fixing

- For $\varnothing 3/5$ mm hole
- For 8/10/12 mm glass thickness
- Zinc alloy with transparent plastic glass support
- Order **fastening materials** separately

Finish	Cat. No.
Nickel-plated	282.13.702

Order qty: Multiples of 10 pcs

Fastening materials for screw fixing shelf supports:




E Mounting screw

- For $\varnothing 3$ mm hole
- Nickel-plated steel

Length	Cat. No.
15 mm	282.13.781
18 mm	282.13.782

Order qty: Multiples of 100 pcs




F M4 mounting screw

- For use with sleeve G
- Nickel-plated steel

Length	Cat. No.
15 mm	282.13.791

Order qty: Multiples of 100 pcs



G Sleeve, M4 internal thread

- For $\varnothing 5$ mm hole
- Bright brass

Length	Cat. No.
8 mm	051.45.004

Order qty: Multiples of 100 pcs



After the shelf support has been tightened in the side panel the glass shelf is put into place



...then the tightening element is inserted.



Pressing down on the tightening element fixes the glass shelf in position. The shelf support prevents it from tipping as well as being unintentionally lifted and removed.