Grass Standard 95° Hinges with 40 mm Cup

HÄFELE

- Opening angle **95º**
- 0 mm, 8 mm or 15 mm crank
- Sprung
- Ø 40 mm cup
- Screw fixing cup
- Choice of slide on or click on arms
- The **Ø 40 cup** makes this an excellent choice for doors up to 38 mm thickness. Please carry out a trial for heavier doors
- Cup: Nickel-plated pressed steel
  Arm: Nickel-plated zinc alloy
- **Mounting plates** for slide on and click on hinges are shown on pages **22-24**
- **Hinge arm cover plates** are shown on page **25**

Screw fixing





95º

Slide on

Crank	Screw fixing
0	323.13.607
8	323.13.616
15	323.13.625

Order qty: Multiples of 10 pcs



95º

Click on

Crank	Screw fixing
0	322.13.630
8	322.13.631
15	322.13.632

Order qty: Multiples of 10 pcs

DBE = Distance of the bore from the edge of the door
b = Thickness of the door
c = Required gap
e = Coverage of the side (end) by door
f = Mounting plate thickness





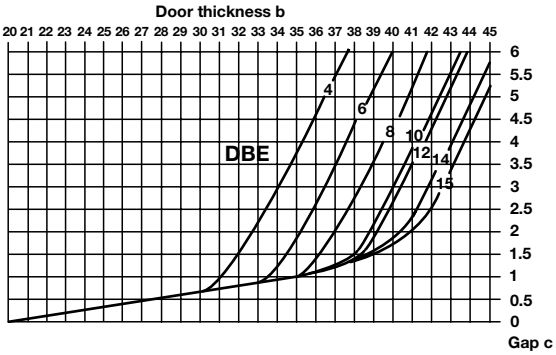

0 Crank

Drawing shows mounting plate thickness f = 2

Please note: With a DBE of 12-15 the opening angle is reduced to 90°



Full overlay

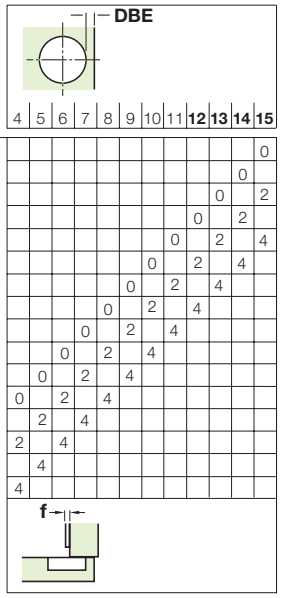

8 Crank

Drawing shows mounting plate thickness f = 2



Half overlay

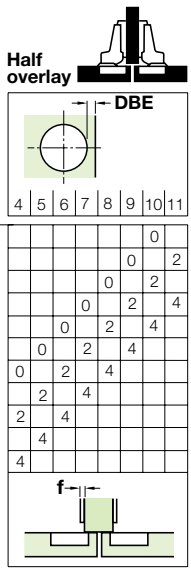

15 Crank

Drawing shows mounting plate thickness f = 4



Inset doors

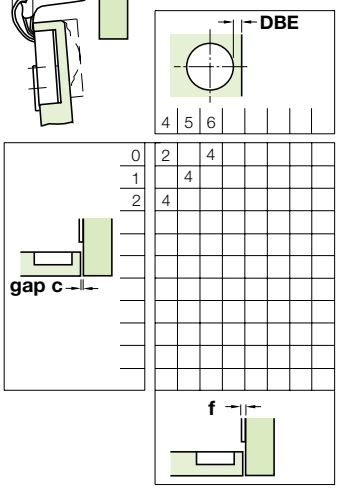

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.

Register online at www.hafele.co.uk
Prices • Stock Availability • Product Information • Ordering