



Wooden lid flap



Lid flap with aluminium frame



As flap stay with wooden flap

**Duo 3667 lid stay**

- **Light version** - min. installation depth **130 mm**
- Opening angles: **75°, 90°, 110°**
- Unhanded design
- For use with wooden lids or lids with aluminium frames, also suitable for use as flap stay
- For flaps with aluminium frame with frame width 20 mm or from 45 mm
- With braking and locking mechanisms, can be adjusted using an **SW4** hex key
- Self closing function
- Clip-mounting on pre-mounted screw fixing brackets, no tools required
- Height  $\pm 2$  mm, side  $+3/-1$  mm, tilt  $\pm 1.5$  mm and pull adjustment facility
- Nickel-plated steel bracket
- Nickel-plated zinc alloy lid stay
- Installation instructions included

**Headings added**


**For wooden lids/lids with aluminium frame width from 45 mm**

Distance from edge	Cat. No.
<b>28 mm</b>	373.66.611
<b>37 mm</b>	373.66.612

**For lids with aluminium frame width 20 mm**

Distance from edge	Cat. No.
<b>28 mm</b>	373.66.621
<b>37 mm</b>	373.66.622

Order qty: 1 pc

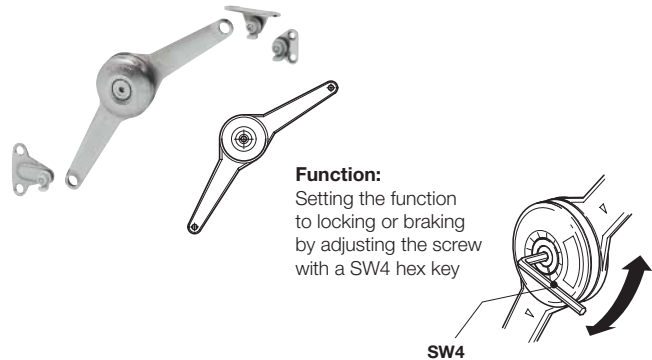

**Table showing maximum flap weight**

Flap height	Maximum flap weight (kg)			
	Function locking		Function braking	
	1 stay	2 stays	1 stay	2 stays
<b>For opening angle 75°</b>				
200	9.0	15.0	11.5	15.0
250	7.0	15.0	9.0	15.0
300	6.0	12.0	7.5	15.0
350	5.0	10.0	6.5	13.0
400	4.5	9.0	6.0	11.5
450	4.0	8.0	5.0	10.0
500	3.5	7.0	4.5	9.0
<b>For opening angle 90°</b>				
200	7.5	15.0	9.5	15.0
250	6.0	12.0	7.5	15.0
300	5.0	10.0	6.0	13.0
350	4.0	8.5	5.5	11.0
400	3.5	7.0	5.0	10.0
450	3.5	6.5	4.0	8.5
500	3.0	6.0	4.0	8.0
<b>For opening angle 110°</b>				
200	6.0	12.0	8.0	15.0
250	5.0	9.5	6.0	12.0
300	4.0	8.0	5.0	10.0
350	3.0	7.0	4.0	9.0
400	3.0	6.0	4.0	7.5
450	2.5	5.0	3.5	7.0
500	2.0	5.0	3.0	6.0

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.