


Concealed Hinges


Grass Hinges for 45° or 30° Corner Applications

- Opening angle **95°**
- Choice of 45° or 30° angle hinge
- Sprung
- Ø 35 mm cup
- Screw fixing or NT Quick fixing cup
- Click on arms
- Cup: Nickel-plated pressed steel, NT version die-cast
- Arm: Nickel-plated zinc alloy
- **Mounting plates** for click on hinges are shown on pages 23-24
- **Hinge arm cover plates** are shown on page 25
- Soft close compatible on sprung hinges

Screw fixing NT Quick fixing

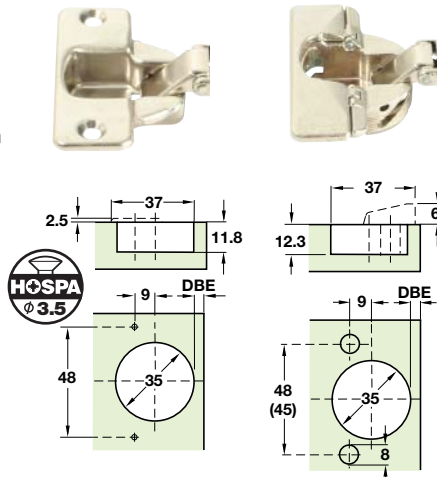

Will also fit 45 mm drilling pattern



95°

Click on

Angle	Screw	NT Quick
45°	322.29.531	322.60.630
30°	322.29.550	-

Order qty: Multiples of 10 pcs

Mounting screws

- Hospa chipboard screws, raised head, Ø 3.5 mm with cross slots
- Nickel-plated steel



Length	Cat. No.	Order qty
15 mm	015.55.639	1000
17 mm	015.55.648	1000
20 mm	015.55.657	1000




Soft close clip on fittings for sprung hinges shown on page 25


6

Hinges

For 45° corner application

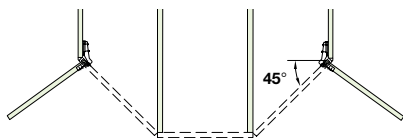

Drawing shows mounting plate thickness $f = 4$ and $DBE = 6$

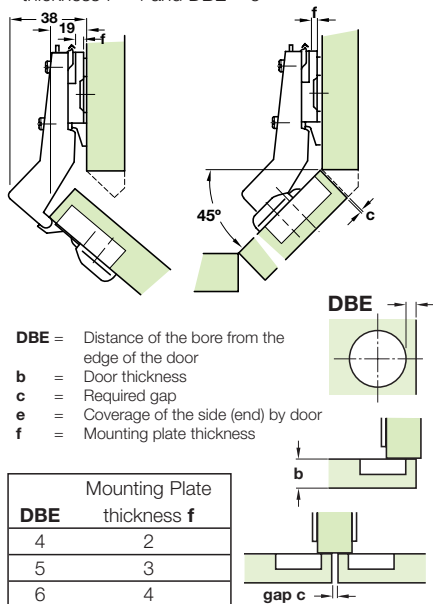

- DBE** = Distance of the bore from the edge of the door
- b** = Door thickness
- c** = Required gap
- e** = Coverage of the side (end) by door
- f** = Mounting plate thickness

For 30° corner application

