

Concealed Hinges Grass Blind Corner Hinges

- Opening angle **90°**
- Sprung
- Ø 35 mm cup
- Screw fixing
- Slide-on arm
- Cup: Nickel-plated steel
- Arm: Nickel-plated zinc alloy
- **Mounting plates** are shown below
- **Hinge arm cover plates** are shown on page 25


Screw fixing



Slide on

Screw fixing	
Cat. No.	323.27.503

Order qty: Multiples of 10 pcs




Mounting screws

- Hospa chipboard screws, raised head, Ø 3.5 mm with cross slots
- Nickel-plated steel




Length	Cat. No.	Order qty
15 mm	015.55.639	1000
17 mm	015.55.648	1000
20 mm	015.55.657	1000

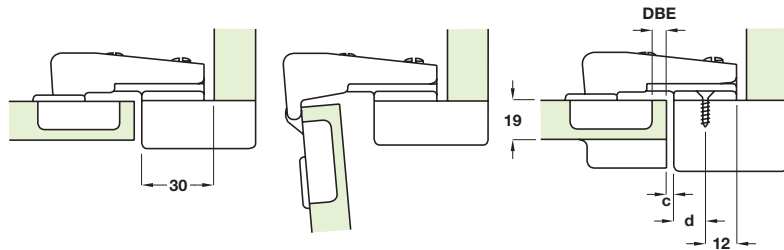

6

Hinges

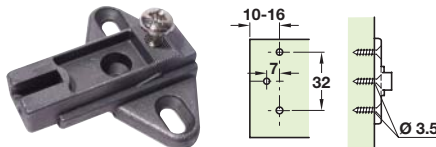

Cruciform mounting plate

- For use with the above blind corner hinge
- Hospa screw fixing
- One part plate with external height adjustment
- Nickel-plated zinc alloy



Height	Cat. No.
0 mm	323.82.719
-04	323.82.718

Order qty: 1 pc

Mounting plate position (d)

Mounting plate position (d)	DBE			
	3	4	5	6
17	0			
16	1	0		
15	2	1	0	
14	3	2	1	0
13	4	3	2	1
12	5	4	3	2
11	6	5	4	3
10	7	6	5	4
				Gap min. (c)

Reveal table

Note

Gap dimensions were determined with an edge radius (of the door) of 1 mm.

Hinge dimensions and calculation of gap with factory setting.

We recommend a trial fitting.

DBE

Door thickness	DBE			
	3	4	5	6
16	0.1	0.1	0.1	0.1
18	0.2	0.2	0.2	0.2
19	0.3	0.3	0.3	0.3
20	0.4	0.4	0.4	0.4
22	0.7	0.7	0.7	0.7
24	1.0	1.0	1.0	1.0
26	1.4	1.4	1.4	1.4
28	1.9	1.9	1.9	1.9
30	3.8	2.9	2.6	2.5
				Reveal min. (c)