

# Concealed Hinges

## Grass Standard 92° Glass Door Hinges

- Opening angle **92°**
- 0 mm, 8 mm or 15 mm crank
- Sprung
- Ø 26 mm cup
- Screw fixing cup





• **Slide on arms**

**Catalogue shows...  
'Click on arms'  
Correct Text is 'Slide on arms'**

- Cup: Black plastic
- Arm: 0 mm crank: Nickel-plated pressed steel  
8 and 15 mm crank: Nickel-plated zinc alloy
- **Mounting plates** for **slide on** hinges are shown on page **22**
- **Hinge arm cover plates** are shown below

**Catalogue shows...  
'Pages 23-24'  
Correct Text is 'Page 22'**

### Screw fixing

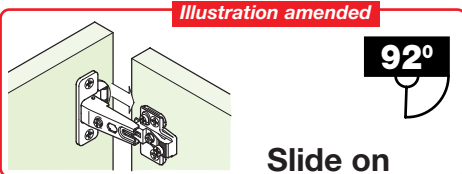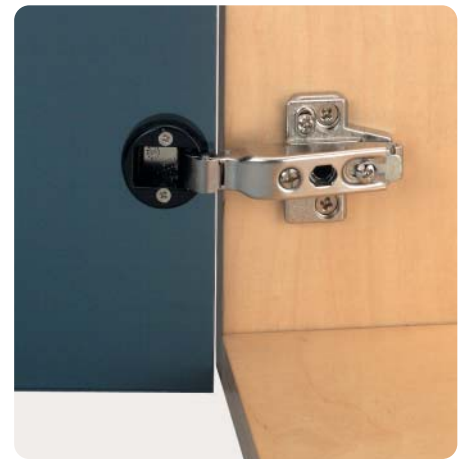


Crank	Screw fixing
0	323.37.303
8	323.37.312
15	323.37.321


For glass thickness **4-6 mm**  
**For safety reasons we recommend that toughened glass be used with these hinges**

Order qty: Multiples of 10 pcs


### 0 Crank




**Full overlay**




	19	0					
	18	0	2				
	17	0	2				
	16	2	4				
	15	2	4				
	14	4					
	13	4					




### 8 Crank




**Half overlay**




	11	0					
	10	0	2				
	9	0	2				
	8	2	4				
	7	2	4				
	6	4					
	5	4					




### 15 Crank



**Inset door**



	0	2	4				
	1	4					
	2	4					
	2	4					

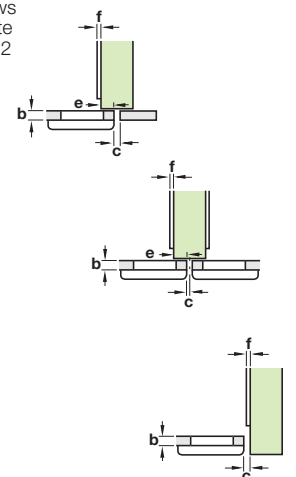


- DBE** = Distance of the bore from the edge of the door
- b** = Thickness of the door
- c** = Required gap
- e** = Coverage of the side (end) by door
- f** = Mounting plate thickness

### Hinge cover plates

- Complete with screws
- Plastic

Finish	D shaped	Round
Polished brass	324.05.824	324.05.833
Polished chrome	324.05.726	324.05.735
Satin nickel	324.05.628	324.05.637*



Order qty: 1 pc (\*multiples of 10 pcs)