


# Hinged Door Fittings Push Catch, Soft Close Damper

## PUSH door opening system

- For opening doors without handles
- For overlay doors
- Locking parts are available for inset doors, information on request
- For doors over 1600 mm high 2 PUSH catches should be used
- Important note: Duomatic self opening hinge must also be fitted, shown on page 40



## C Adjustable soft close damper

- For use with self-closing hinges
- Adjustable damping pressure, front and backside
- For mounting on the hinge side of the cabinet
- Unhanded
- Single screw installation
- Childproof, no loose parts
- Grey plastic




Resistance	Cat. No.
20 Newtons	356.15.520
40 Newtons	356.15.521

Order qty: Multiples of 20 pcs

6

Hinges

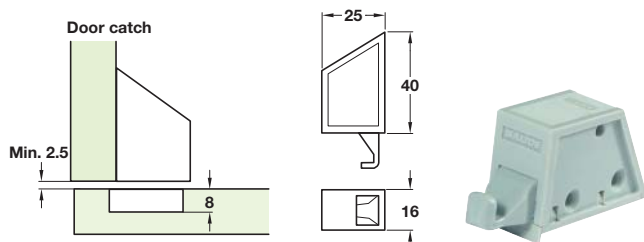


## A PUSH door catch

- Screw fixing with positioning aid
- For fitting to upper or lower carcase board
- For doors over 1600 mm high 2 PUSH catches should be used
- 2 side cover caps and fixing screws included
- Grey plastic

	Cat. No.
Door catch	329.44.500

Order qty: 1 pc



## B Locking part for PUSH door catch

- Press fit
- For wooden **overlay** doors
- Grey plastic

	Cat. No.
Locking part	329.44.532

Order qty: 1 pc