
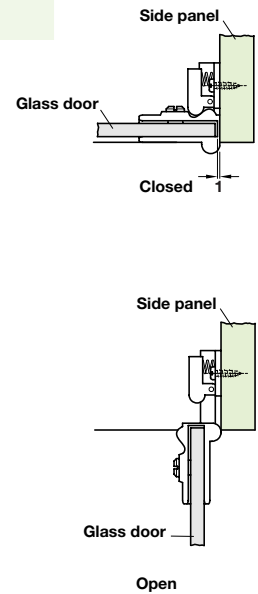


6

Hinges

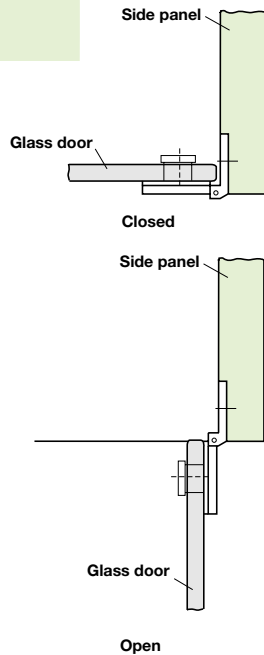

A Glass door hinge

- Maximum opening angle **180°**
- For **6 to 8 mm** glass thickness
- Screw fixing
- Glass secured with knurled nut
- 3 mm lateral adjustment
- For **inset** doors
- Unsprung
- Unhanded design
- Minimum 2 hinges per door required
- Brass hinge
- **For safety reasons we recommend that toughened glass be used with these hinges**

B Glass door pivot hinge

- Maximum opening angle **180°**
- For maximum glass thickness **6.8 mm**
- For **inset** doors
- Sprung
- Minimum 2 hinges per door required
- Black zinc alloy hinge
- **For safety reasons we recommend that toughened glass be used with these hinges**

Finish	Cat. No.
Matt nickel-plated	361.85.609

	Cat. No.
Glass door pivot hinge	361.68.300

Order qty: 1 pc

Order qty: 1 pair

Mounting screws

Hospa chipboard screws countersunk head Ø 3.5 mm with cross slots



Length	Cat. No.
15 mm	015.35.637
17 mm	015.35.646
20 mm	015.35.655

Order qty: Multiples of 1000 pcs

Mounting screws

Varianta special screws raised head Ø 5 mm with cross slots



Length	Cat. No.
10.5 mm	264.25.794
13.5 mm	264.25.785

Order qty: Multiples of 100 pcs