

**A Mitred hinge**

- Specially designed to enable door and carcass edges to meet at mitred angles
- Opening angle **135°**
- For door and side panel thickness **16 - 22 mm** with **45° mitre angle**
- Ø 35 mm cup
- Screw fixing
- Adjustable up to 3 mm in 3 directions
- Nickel-plated zinc alloy cup and nickel-plated steel arm

Opening angle	Cat. No.
135°	325.00.708

Order qty: 1 pc



**Mounting screws**

Finish: Nickel-plated steel  
Hospa chipboard screws raised head Ø 3.5 mm with cross slots



Length	Cat. No.
15 mm	015.55.639
17 mm	015.55.648
20 mm	015.55.657

Order qty: Multiples of 1000 pcs

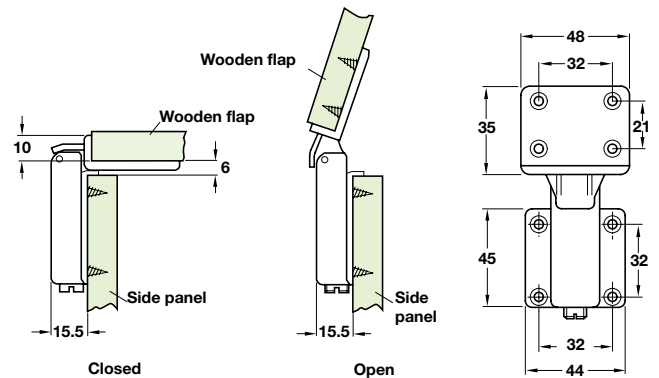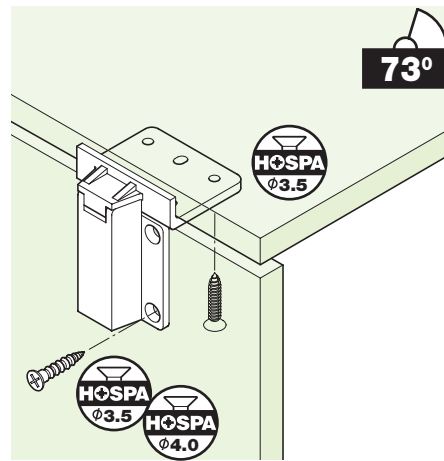

**B Hi-fi flap hinge**

- Maximum opening angle **73°**
- Screw fixing
- With standard spring strength
- Minimum 2 hinges per flap required
- Black zinc alloy hinge

Opening angle	Cat. No.
73°	356.50.321

Order qty: 1 pc

**Mounting screws**

Finish: Nickel-plated steel  
Hospa chipboard screws countersunk head Ø 3.5 mm with cross slots



Length	Cat. No.
15 mm	015.35.637
17 mm	015.35.646
20 mm	015.35.655

Order qty: Multiples of 1000 pcs

**Mounting screws**

Finish: Nickel-plated steel  
Hospa chipboard screws countersunk head Ø 4.0 mm with cross slots



Length	Cat.No.
15 mm	015.35.824
17 mm	015.35.833
20 mm	015.35.842

Order qty: Multiples of 1000 pcs

