


### A Easy mount concealed hinge

- Opening angle **90°**
- Easily installed by screw-fixing
- Unsprung
- For minimum door thickness **16 mm**
- For side panels **16 - 22 mm** thick
- To hinge one overlay door, side or centre panel mounted or one inset door, side panel mounted
- Zinc plated steel hinge




Opening angle	Cat. No.
90°	343.34.960

Order qty: 1 pc

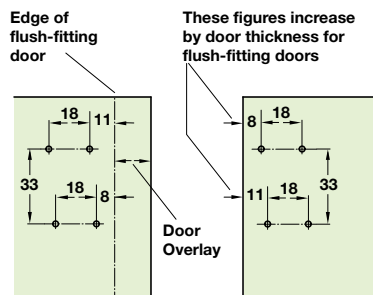

6

Hinges

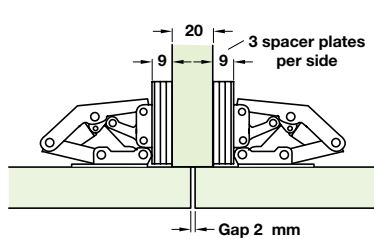

Examples of corner gap measurements for single sided overlay door mountings


Door overlay	14 mm	16 mm	16 mm	16 mm	20 mm	20 mm	20 mm
Gap	2 mm	1 mm	2 mm	3 mm	-	1 mm	2 mm
No. of spacer plates	3	2	2	2	-	-	-
Side panel thickness	16 mm	17 mm	18 mm	19 mm	20 mm	21 mm	22 mm

### B Spacer plate

- Drilling dimensions as per hinge
- 2 mm thick
- White plastic

Opening angle	Cat. No.
90°	343.34.780

Order qty: Multiples of 20 pcs



### Mounting screws

Hospa chipboard screws  
pan head  
Ø 3.5 mm  
with cross-slots



Finish: Nickel plated steel

Length	Cat. No.
13 mm	015.71.624
15 mm	015.71.633
17 mm	015.71.642

Order qty: Multiples of 1000 pcs