


A Fall-ex flap stay

- With braking mechanism
- Screw-mounting to side panel with system Varianta 32 series drilled holes
- Screw-mounting to flap
- Unhanded design
- Nickel-plated steel flap stay with nickel-plated brass square tubing

Length	Cat. No.
250 mm	372.17.753
325 mm	372.17.762
450 mm	372.17.771


Order qty: 1 pc

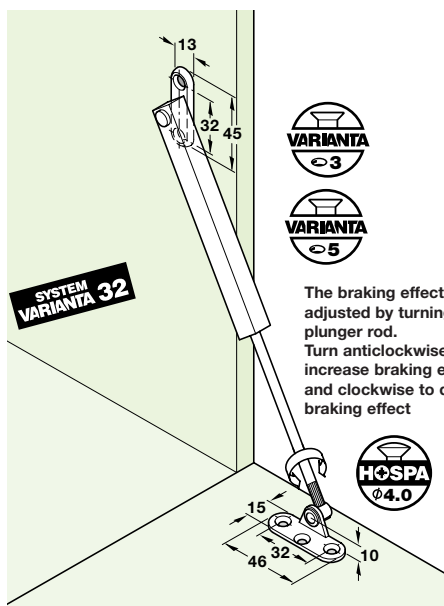

Flap hinges are shown on pages 85-86

6

Hinges

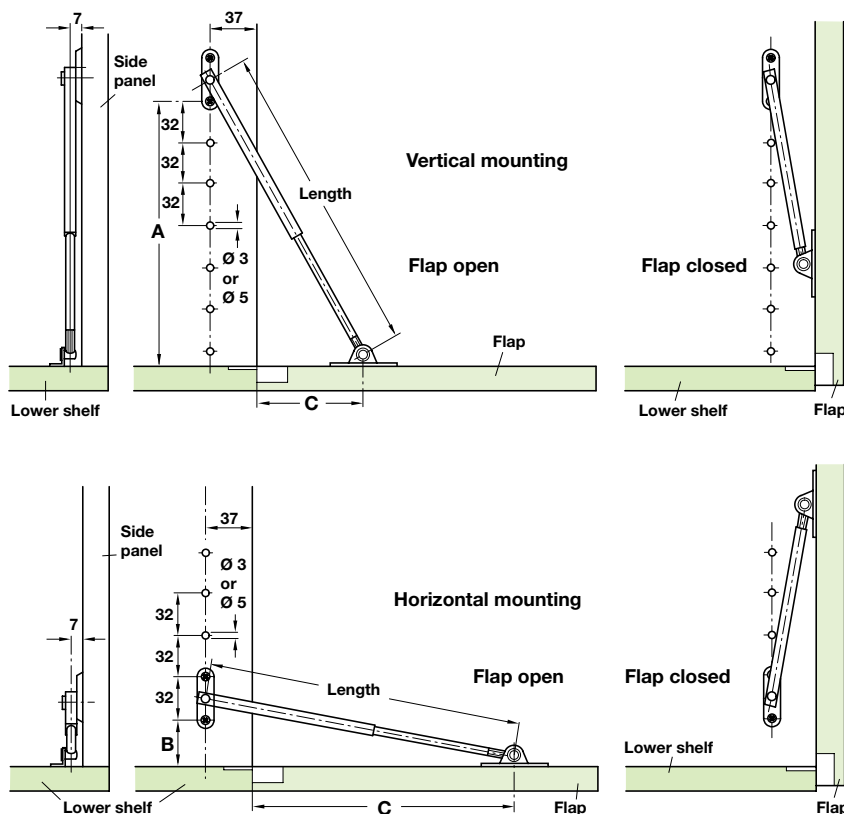

Length	Vertical mounting		Horizontal mounting
	Internal cabinet height	Distance A	Distance B
250 mm	300 mm to 400 mm	214.5 mm	22.5 mm
325 mm	350 mm to 450 mm	288.0 mm	54.5 mm
450 mm	400 mm to 500 mm	406.5 mm	118.5 mm

Determine distance C by trial mounting

Mounting screws
Hospa chipboard screws raised head Ø 4 mm with cross slots Z



Finish: Nickel plated steel

Length	Cat. No.
20 mm	015.55.844
25 mm	015.55.853
30 mm	015.55.862

Order qty: Multiples of 1000 pcs

Mounting screws
Varianta screws for Ø 3 mm holes countersunk head with cross slots



Finish: Nickel-plated steel

Length	Cat. No.
10.5 mm	013.15.617
13.5 mm	013.15.626
16.0 mm	013.15.635

Order qty: Multiples of 100 pcs

Mounting screws
Varianta screws for Ø 5 mm holes countersunk head with cross slots



Finish: Nickel-plated steel

Length	Cat. No.
10.5 mm	340.29.715
13.5 mm	340.29.724
16.0 mm	340.29.733

Order qty: Multiples of 100 pcs