


Concealed Hinges


Grass Standard 95° Hinges

- Opening angle **95°**
- 0 mm, 8 mm or 15 mm crank
- Sprung or unsprung
- Ø 35 mm cup
- Screw fixing cup
- Choice of slide on or click on arms
- Cup: Nickel-plated pressed steel
- Arm: Nickel-plated pressed steel
- **Mounting plates** for slide on and click on hinges are shown on pages **22-24**
- **Hinge arm cover plates** are shown on page **25**
- Soft close compatible on sprung hinges

Screw fixing



Soft close clip on fitting for sprung hinges shown on page 25

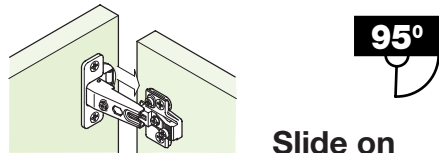

Slide on

Crank	Sprung	Unsprung
0	323.11.505	323.10.508
8	323.11.514	323.10.517
15	323.11.523	323.10.526

Order qty: Multiples of 10 pcs



Click on

Crank	Sprung	Unsprung
0	322.11.530	322.10.530
8	322.11.531	322.10.531
15	322.11.532	322.10.532



Order qty: Multiples of 10 pcs

Mounting screws


- Hospa chipboard screws, raised head, Ø 3.5 mm with cross slots
- Nickel-plated steel




Length	Cat. No.	Order qty
15 mm	015.55.639	1000
17 mm	015.55.648	1000
20 mm	015.55.657	1000

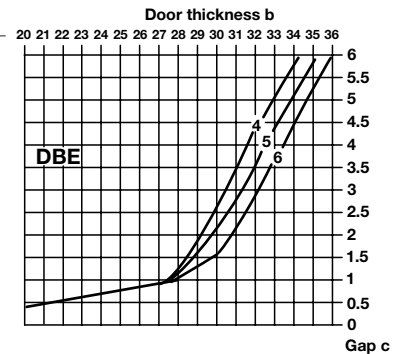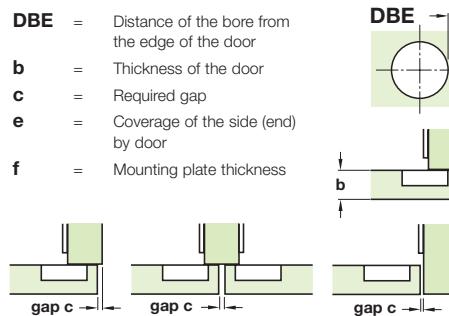


0 Crank

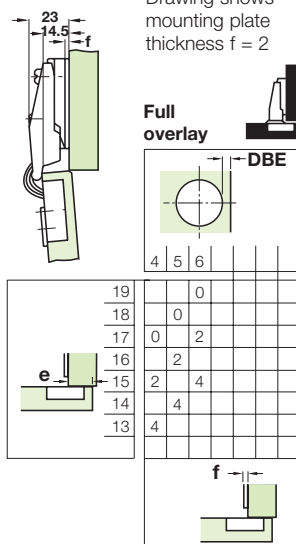

8 Crank

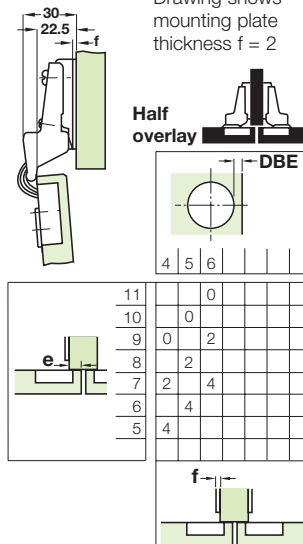

15 Crank

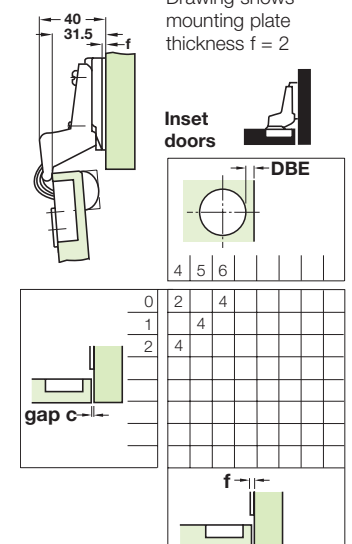

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.