




**Important note:** Unless otherwise indicated fixing screws are not included and must be ordered separately.

The symbol shown next to the drawing indicates the type and size of screw required.

**Fixing materials** can be found in **Section 11** from page **3**.

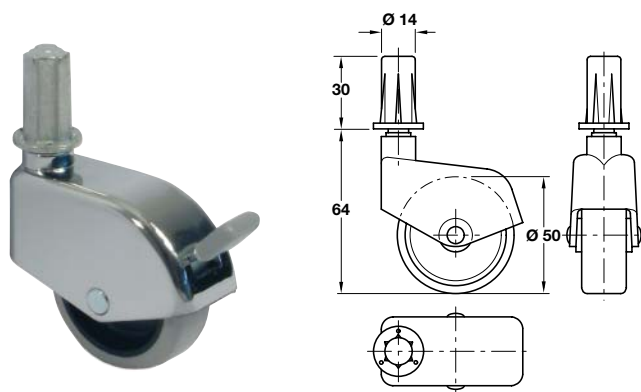


### A Enclosed wheel castor, press fit

- Ø 50 mm
- With zinc alloy press fit Ø 14 x 30 mm socket with three holes for fixing pins
- Maximum load carrying capacity **50 kg** per castor
- Chrome-plated zinc alloy housing with grey soft plastic wheels

	Without brake	With brake
Cat. No.	660.18.246	660.19.243

Order qty: 1 pc

Photograph shows castors with brake, illustration shows castors without brake

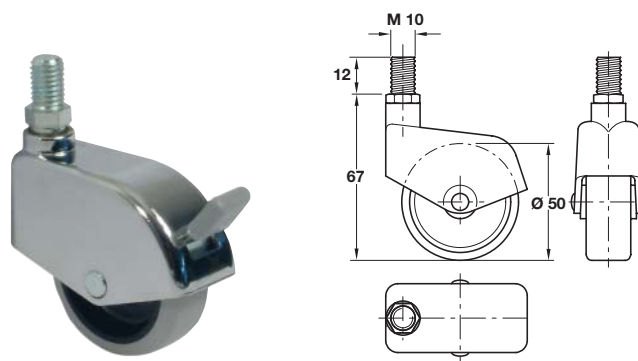


### C Enclosed wheel castor, M10 thread fixing

- Ø 50 mm
- With M10 x 15 mm threaded bolt
- Maximum load carrying capacity **50 kg** per castor
- Chrome-plated zinc alloy housing with grey soft plastic wheels

	Without brake	With brake
Cat. No.	660.18.282	660.19.289

Order qty: 1 pc

For other accessories refer to **Section 11** page **16**




### D M10 T-nut, knock-in

- With four prongs
- For use in mounting M10 thread fixing castors under wooden bases
- Bright steel

	Cat. No.
M10 T-nut	031.00.301

Order qty: Multiples of 100 pcs




### E Square plug with M10 internal thread

- For use with castors with M10 threaded bolts
- For knock-in installation in 25 x 25 mm and 30 x 30 mm square tubes, 1.5-2 mm gauge steel
- Black plastic

Size	Cat. No.
25 x 25 mm	652.11.627
30 x 30 mm	652.11.636

Order qty: 1 pc

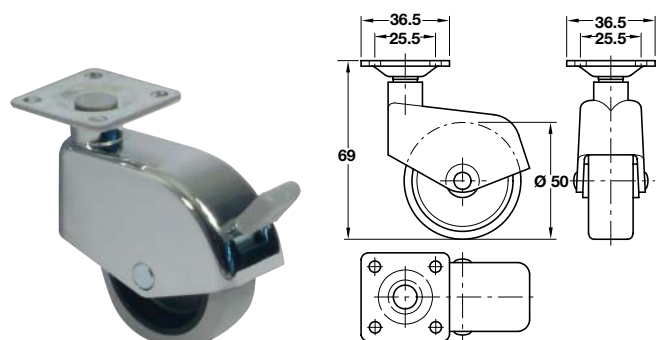

### B Enclosed wheel castor, plate fixing

- Ø 50 mm
- With 36.5 x 36.5 mm mounting plate
- Maximum load carrying capacity **50 kg** per castor
- Chrome-plated zinc alloy housing with grey soft plastic wheels

	Without brake	With brake
Cat. No.	660.18.264	660.19.261

Order qty: 1 pc

