


A Swivel castor, plate fixing

- With screw on 60 x 60 mm mounting plate
- Without brake
- Galvanized steel housing with black polyamide wheel with grey solid rubber tyre

Wheel Ø	50 mm	75 mm
Load capacity	40 kg	60 kg
Installed height	71 mm	100 mm
Wheel width	18 mm	25 mm
Overhang	25 mm	29 mm
Cat. No.	663.06.910	663.06.920

Order qty: 1 pc

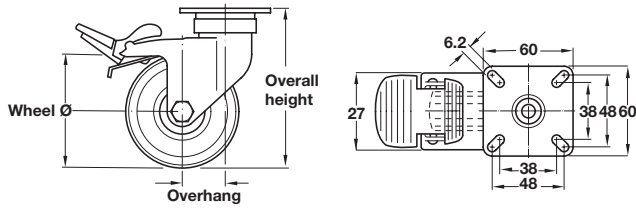


B Swivel castor, plate fixing

- With screw on 60 x 60 mm mounting plate
- With brake
- Galvanized steel housing with black polyamide wheel with grey solid rubber tyre

Wheel Ø	50 mm	75 mm
Load capacity	40 kg	60 kg
Overall height	71 mm	100 mm
Wheel width	18 mm	25 mm
Overhang	25 mm	29 mm
Cat. No.	663.16.910	663.16.920

Order qty: 1 pc

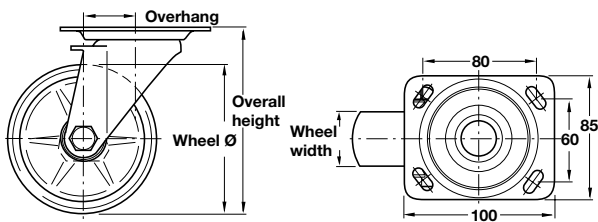

C Swivel castor, plate fixing

- Without brake
- Two enclosed ball races are fitted in the ring mount
- Galvanized steel bracket
- Black polypropylene wheel with friction bearing on steel spindle and hollow steel hub

Wheel Ø	80 mm	100 mm	125 mm
Wheel width	32 mm	37 mm	40 mm
Overhang	35 mm	35 mm	40 mm
Overall height	100 mm	125 mm	150 mm
Max load per wheel approx	100 kg	approx 125 kg	approx 150 kg
Cat. No.	670.01.405	670.01.414	670.01.423

Order qty: 1 pc

7

Castors, Feet, Legs and Table Fittings

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.