


1

A Slotted spindle

- For use with 'Fusital' lever furniture
- 114, 120 or 130 mm x 8 mm square
- To suit doors up to **48, 54** and **64** mm thick
- Zinc plated steel

Length	Door thickness	Cat. No.
114 mm	32-48 mm	909.80.614
120 mm	38-54 mm	909.80.622
130 mm	48-64 mm	909.80.635

Order qty: 1 pc


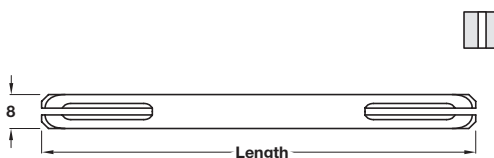


B Piercing spindle

- For use with 'StarTec' and other levers
- 100, 110 or 130 mm x 8 mm square
- To suit doors up to **44, 54** and **64** mm thick
- Zinc plated steel

Length	Door thickness	Cat. No.
100 mm	Up to 44 mm	909.46.028
110 mm	Up to 54 mm	909.46.031
130 mm	Up to 64 mm	909.46.035

Order qty: 1 pc

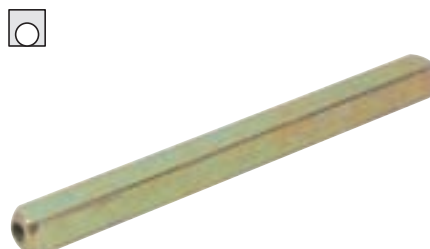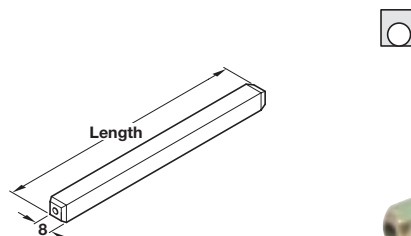


C Pitts (plain) spindle

- 82, 120 130 or 138 mm x 8 mm square
- To suit doors up to **34, 44, 54** and **64** mm thick
- Zinc plated steel

Length	Door thickness	Cat. No.
82 mm	Up to 34 mm	911.39.357
120 mm	Up to 44 mm	911.39.376
130 mm	Up to 54 mm	911.39.377
138 mm	Up to 64 mm	911.39.358

Order qty: 1 pc

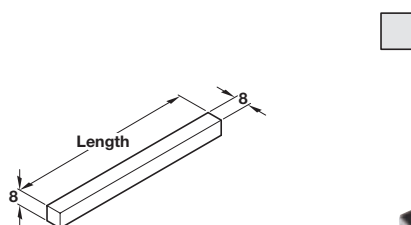


D Pitts (plain) spindle

- 62, 85 or 108 mm x 5 mm square
- To suit doors up to **44, 54** and **64** mm thick
- Zinc plated steel

Length	Door thickness	Cat. No.
62 mm	Up to 44 mm	909.00.910
85 mm	Up to 54 mm	909.00.907
108 mm	Up to 64 mm	909.00.962

Order qty: 1 pc

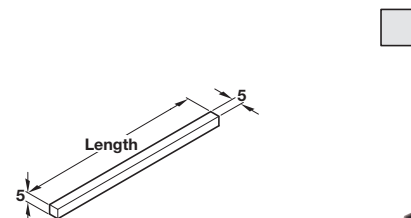


E FSB 'Stabil' half spindle





- For use exclusively with **FSB female lever handle**, one side of door only, with blind hole
- Steel, with sprung steel anchor clamp

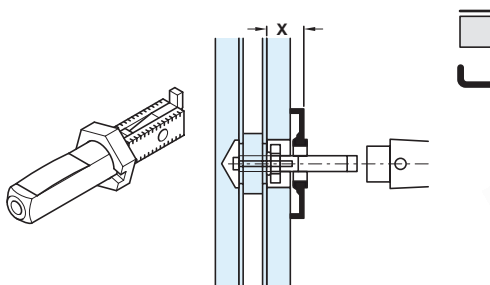Size	Dim 'x'	Cat. No.
8 x 60 mm	22.5-31.5 mm	909.77.560
8 x 70 mm	32.5-41.5 mm	909.77.570

Order qty: 1 pc



Guide to spindle types

-  **Plain spindle** - No grub screws usually present
-  **Piercing spindle** - Grub screw with cylinder end
-  **Slotted spindle** - Grub screw with pointed end
-  **Stabil spindle** - Grub screw with cylinder end

TCH-A1 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.