EKU Frontino 45 H Vorfront Bottom Rolling

- Application: High quality domestic furniture 2 or 3 straight sliding overlay doors on dual track. Ideal for where larger sliding doors are required, for space saving and where standard cabinet design may need to match hinged panel installations. Doors fitted to front of unit
- Features: Bottom rollers take load at base Height adjustment ± 3 mm from slotted fixings on bottom rollers
- Range: Max. door panel weight 45 kg For door thickness 19-25 mm Max. door height 2400 mm Max. door width 1400 mm
- · Guide rail and bottom track must be ordered separately

For ancillary door hardware i.e. locks, handles and bolts etc. refer to page 19

A Double guide rail

With screw-mounting holes. Bright aluminium

Length	2.5 m	3.5 m
Cat. No.	405.52.025	405.52.035

Order qty: 1 pc (2.5 or 3.5 m length)

Frontino 45 H Vorfront fitting sets

- Guide stopper. To fit in top guide rail. Grey
- Top guide, for outer door. With slotted fixing holes for easy installation and adjustment. Galvanized steel
- Top guide, for inner door. With slotted fixing holes for easy installation and adjustment. Galvanized steel
- Bottom roller, for outer door. Plastic-tyred wheel with ball bearing. Galvanized steel
- Bottom roller, for inner door. Plastic-tyred wheel with ball bearing. Galvanized steel
- Track stopper, left hand, With retaining spring. For bottom track. Grey plastic
- Track stopper, right hand. With retaining spring. For bottom track. Grey plastic
- Rubber buffer. For installation in door edge. Black rubber

Fixings and installation instructions included

Fitting sets for overlay wooden doors				
Comprising:	for 2 door	s for 3 doors		
B Guide stopper	4 pcs	4 pcs		
C Top guide, outer doo	or 2 pcs	2 pcs		
D Top guide, inner doo	r 2 pcs	4 pcs		
E Bottom roller, outer of	loor 2 pcs	2 pcs		
F Bottom roller, inner d	oor 2 pcs	4 pcs		
G Track stopper, left	2 pcs	2 pcs		
H Track stopper, right	2 pcs	2 pcs		
I Door buffer	-	2 pcs		
For door thickness Cat. No.				
19 mm only	405.25.124	405.25.125		
20-25 mm	405.25.122	405.25.123		

Order qty: 1 set (order 1 set per 2 or 3 door application)

J Double bottom track

Will Screw-mol	ith screw-mounting noies. Anodised aluminium		
Length	2.5 m	3.5 m	
Cat. No.	405.29.025	405.29.035	

163.5

59

9.5


Order qty: 1 pc (2.5 or 3.5 m length)


K Centre door stopper optional

For cabinets with three doors. Allows outer panel to slide either to the right or to the left. Grey plastic

	405.33.031
Cat. No.	

Order qty: 1 pc (order 1 pc per 3 door application)

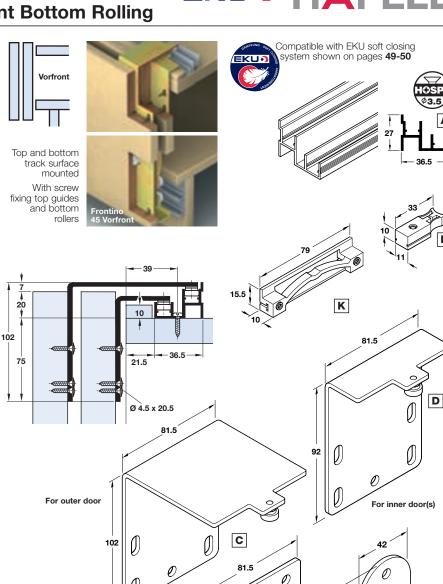



Н

Right hand

G

J

For inner door(s) F

10

65

min. 100