

Application:

Junior 120 is a vertically adjustable sliding door fitting for interior doors. Exceptionally light and silent action. All parts are corrosion resistant. Ideal for **heavier duty** cavity applications

Range:

Max. door weight **120 kg**
 Min. door thickness **35 mm**
 Max. door height normally **2.5 m**

HAWA-Junior 120 fitting set comprises fittings **B, C, D** and **E**


Tracks are not included in the fitting set and must be ordered separately

Installation drawing reference **17689**

For ancillary door fittings, locks, handles, bolts, seals, etc. see pages 4-6



Top track side fixing profile, shown on page 17





A Junior 120 top track

With screw holes for soffit fixing. Silver anodised aluminium. **Two top tracks are mounted side by side for double or multiple doors**

	2.5 m	3.0 m
Cat. No.	941.20.250	941.20.300

Order qty: 1 pc (2.5 or 3.0 m length)

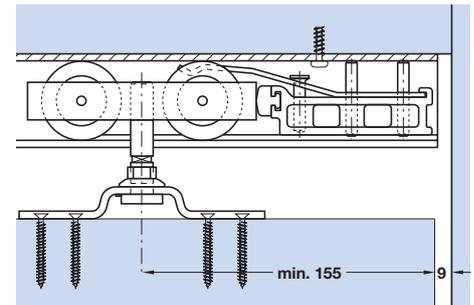

HAWA-Junior 120 fitting set

B Trolley hanger. Sleeve bearing mounted, high-grade polyamide, tandem rollers. Aluminium carriage and zinc-alloy mounting plate. Complete with fastening materials



C Track stopper. For adjustable mounting in top track. Zinc alloy housing with steel spring and rubber buffer. Adjustable retaining force

D Guide, rattle proof. For screw mounting to floor. Black plastic



E Rubber buffer. Screw fixing

For 1 door	
B Trolley hanger	2 pcs
C Track stopper	1 pc
D Guide	1 pc
E Rubber buffer	1 pc
Cat. No.	941.20.001

Order qty: 1 set

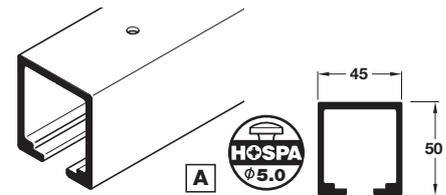

The retaining force can be adjusted with a screwdriver

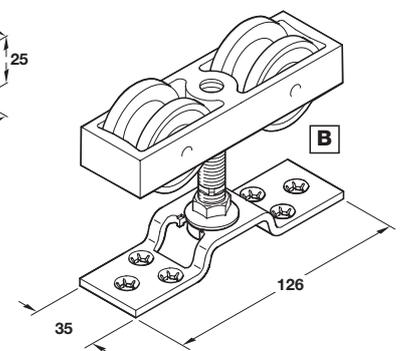



Important mounting note: If the sliding door is required to stop at both ends, we recommend installing an additional track stopper **C**

C Additional track stopper

For adjustable mounting in top track. Zinc-alloy housing with steel spring and rubber buffer. Adjustable retaining force

Cat. No.	941.20.041
----------	------------

Order qty: 1 pc



Alternative bottom guiding:

F Guide

Steel with nylon pilot

Cat. No.	407.49.111
----------	------------

Order qty: 1 pc (2 pcs required per door)

G Channel

Pre-drilled for countersunk screws. Anodised aluminium

Length	2.5 m	3.5 m
Cat. No.	940.41.250	940.41.350

Order qty: 1 pc (2.5 or 3.5 m length)

