

• Application:

Junior 250 is a vertically adjustable sliding door fitting for interior doors. Exceptionally light and silent action. All parts are corrosion resistant. Ideal for **heavier duty** cavity applications.


• Range:

Max. door weight **250 kg**
 Min. door thickness **35 mm**
 Max. door height normally **2.5 m**

• HAWA-Junior 120 fitting set comprises fittings **C, D, E, F** and **G**

• Tracks are not included in the fitting set and must be ordered separately

• Installation drawing reference 17689

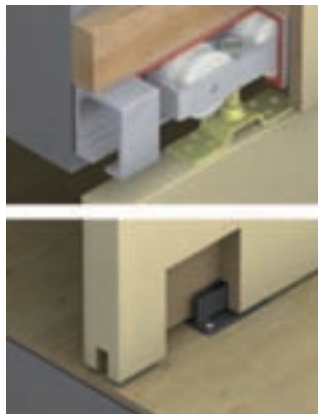

For ancillary door fittings, locks, handles, bolts, seals, etc. see pages 4-6

[A] Junior 250 top track

With screw holes for soffit fixing. Silver anodised aluminium. **Two top tracks are mounted side by side for double or multiple doors**

Length	2.0 m	2.5 m	3.5 m
Cat. No.	942.56.920	942.56.925	942.56.935

Order qty: 1 pc (2.0, 2.5 or 3.5 m length)

[B] Connecting bolt set

For top track. Set = 2 pcs

Cat. No.	942.56.090
----------	------------

Order qty: 1 set

HAWA-Junior 250 fitting set

C Trolley hanger. Sleeve bearing mounted, high-grade polyamide, tandem rollers. Aluminium carriage and zinc-alloy mounting plate. Complete with fastening materials

D Track stopper. For adjustable mounting in top track. Zinc alloy housing with steel spring and rubber buffer. Adjustable retaining force

E Guide, rattle proof. For screw mounting to floor. Black plastic

F Rubber buffer. Screw fixing

For 1 door	
C Trolley hanger	2 pcs
D Track stopper	1 pc
E Guide	1 pc
F Rubber buffer	1 pc
Cat. No.	942.56.001

Order qty: 1 set

Important mounting note: If the sliding door is required to stop at both ends, we recommend installing an additional track stopper **D**

[D] Additional track stopper

For adjustable mounting in top track. Zinc-alloy housing with steel spring and rubber buffer. Adjustable retaining force

Cat. No.	942.56.041
----------	------------

Order qty: 1 pc

Note: Bottom guide **E** is only suitable for doors up to 1000 mm wide. For wider doors use **alternative bottom guiding with aluminium channel:**

[G] Guide

Steel with nylon pilot

Cat. No.	407.49.111
----------	------------

Order qty: 1 pc (2 pcs required per door)

[H] Channel

Pre-drilled for countersunk screws. Anodised aluminium

Length	2.5 m	3.5 m
Cat. No.	940.41.250	940.41.350

Order qty: 1 pc (2.5 or 3.5 m length)

