




L Bottom channel, 24 x 24 mm

Anodised aluminium

Length	2.5 m	3.5 m
Cat. No.	940.81.250	940.81.350

Order qty: 1 pc (2.5 or 3.5 m length)







M Bottom channel

For wall fitting. Anodised aluminium.

Length	2.5 m	3.5 m
Cat. No.	940.81.725	940.81.735

Order qty: 1 pc (2.5 or 3.5 m length)

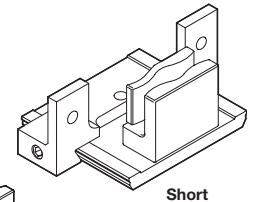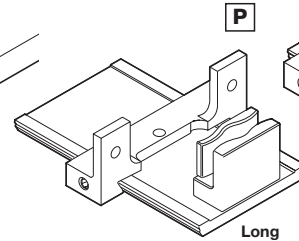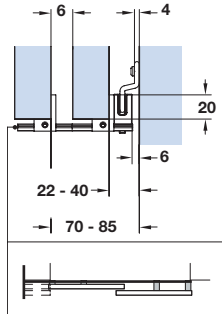

N Stop bumper

Complete with buffer

Cat. No.	940.80.051
----------	------------




Order qty: 1 pc

O Z-Guide profile

Anodised aluminium

Length	2.5 m	3.5 m
Cat. No.	947.01.725	947.01.735

Order qty: 1 pc (2.5 or 3.5 m length)

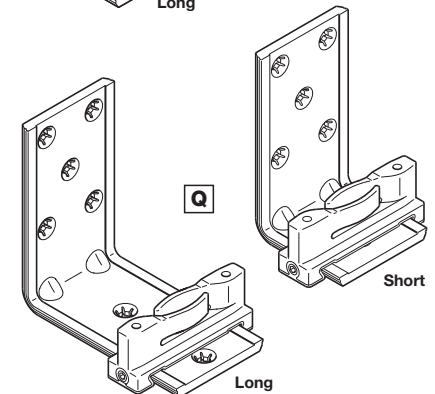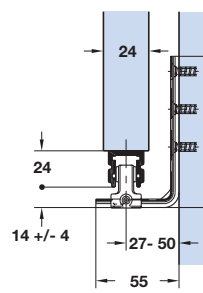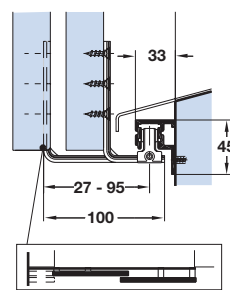

P Floor guide

Rattle proof. For use with Z-guide profile. Aluminium and black plastic

Type	Short	Long
Cat. No.	947.00.045	94.00.046

Order qty: 1 pc

Q HAWA-Confort 160 guide

Rattle proof. For use with bottom channel L or M. Laterally adjustable. Floor mounted. Black plastic.

Type	Short	Long
Cat. No.	941.60.071	941.60.073




Order qty: 1 pc

R Guide

Rattle proof. Adjustable. For screw mounting to floor. Black plastic

Cat. No.	941.60.032
----------	------------

Order qty: 1 pc

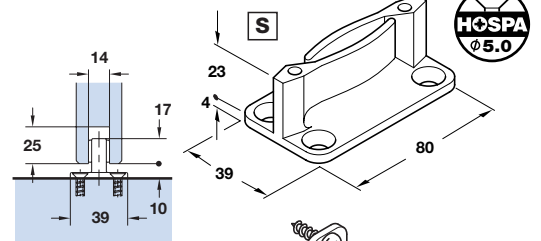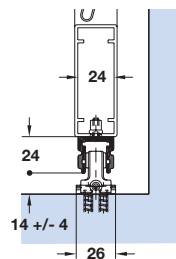

S Guide

Rattle proof. Adjustable. For screw mounting to floor. Black plastic.

Cat. No.	941.60.031
----------	------------



Order qty: 1 pc

T Point guide Ø 25 mm

For sliding shutters. Plastic

Cat. No.	941.60.034
----------	------------

Order qty: 1 pc

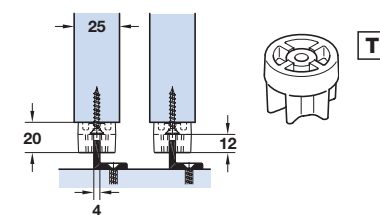


U Sliding shutter lock set

Lock automatically engages as the shutters close and can be released from the room interior side only by using a pull-cord. Prevents shutters from opening by themselves, even under the most adverse wind conditions.

Steel and grey plastic

Cat. No.	947.02.024
----------	------------

Order qty: 1 set

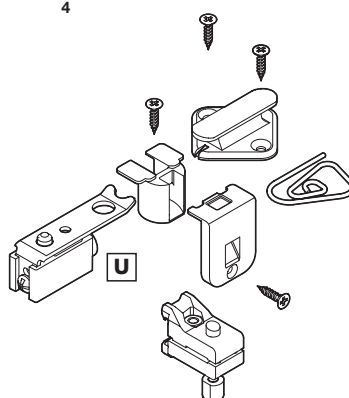

V Sliding shutter catch

Catch holds together adjacent shutter pairs, giving additional prevention of shutters opening by themselves. Complete with fixing screws. Stainless steel.

Cat. No.	947.02.025
----------	------------

Order qty: 1 pc

