

# Fittings for Straight Sliding Interior Timber Doors

## Straightaway 50

- **Application:** Internal straight sliding door gear, top hung, soffit fixed, for domestic and light duty commercial use
- **Range:** Maximum door weight **50 kg**  
Maximum door height **2.1 m**  
Door thickness **min. 25 mm**

For ancillary door fittings, locks, handles, bolts, seals, etc. see pages 4-6





### A Straightaway 50 single top track

Undrilled. Anodised aluminium

Length	2.5 m
Cat. No.	940.55.925

Order qty: 1 pc (2.5 m length)

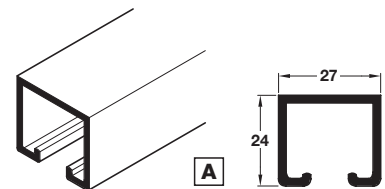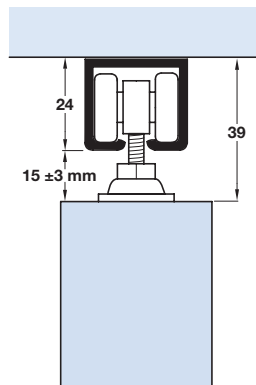

### Straightaway 50 fitting set

**B Top roller guide.** Aluminium carriage with four nylon wheels and integral ball bearings, zinc alloy mounting plate. Fixings included

**C Track stopper.** For mounting in top track. White plastic. Fixing screw included.

**D Bottom guide.** For screw mounting to floor. Galvanized steel.

<b>For 1 door</b>	
<b>B</b> Top roller guide	<b>2</b> pcs
<b>C</b> Track stopper	<b>2</b> pcs
<b>D</b> Bottom guide	<b>1</b> pc
Cat. No.	940.55.000

Order qty: 1 set

