


• **Application:** For either internal or external doors, residential or commercial. Heavy duty version of Straightaway 700 operating on same brass galvanised steel or stainless steel bottom tracks. Ideal for sliding double glazed doors

• **Range:**
 Max. door weight **180 kg**
 Max. door height **3 m**

• **Recommended door construction:**
 Door thickness **44-60 mm**

• **Fixing:** Top guide tracks soffit fixed. Floor tracks may be recessed or face fixed. Mortice for bottom rollers must fit tight around casing, so that weight of door is carried on top of roller casing above wheel

For ancillary door fittings, locks, handles, bolts, etc. see pages 4-6

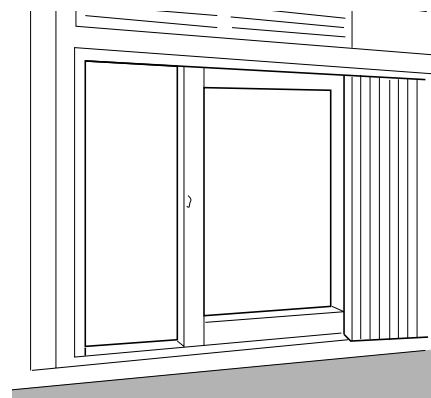

A Top safety guide channel

Pre-drilled for countersunk screws. Galvanized steel to BS EN 10142

Length	Cat. No.
2.1 m	941.80.821
3.0 m	941.80.830

Order qty: 1 pc (2.1 or 3.0 m length)

B Track stopper

Rubber stop block with steel clamp plate, washer and nut

Cat. No.	941.80.041
----------	------------

Order qty: 1 pc (2 pcs required per panel)

C Top roller guide

Stagger top fixing position to obtain correct tension. Where high wind pressure consider one extra top guide. Nylon roller, steel plate

Cat. No.	941.80.030
----------	------------

Order qty: 1 pc (2 or 3 pcs required per panel)

D Bottom roller

Die cast casing. Steel wheel with ball bearing

Cat. No.	941.80.010
----------	------------

Order qty: 1 pair (1 pair required per panel)

E Bottom track, 10 x 21 mm

Pre-drilled for countersunk screws. Galvanized steel

Length	Cat. No.
3.0 m	404.39.921

Order qty: 1 pc (3.0 m length)

F Bottom track, 10 x 21 mm

Pre-drilled for countersunk screws. Brass

Length	Cat. No.
2.1 m	941.80.721
3.0 m	941.80.730

Order qty: 1 pc (2.1 or 3.0 m length)

G Bottom track, 10 x 21 mm

Pre-drilled for countersunk screws. Stainless steel

Length	Cat. No.
2.1 m	941.80.621
3.0 m	941.80.630

Order qty: 1 pc (2.1 or 3.0 m length)

Alternative to tracks E, F or G, ideal for internal or shop entrance doors, also suitable for Straightaway 700:

H Bottom track, 10 x 25 mm

Pre-drilled for countersunk screws. Brass

Length	Cat. No.
2.1 m	941.80.921
3.0 m	941.80.930

Order qty: 1 pc (2.1 or 3.0 m length)

