

Fittings for Straight Sliding Timber Doors

Bottom Guiding

Clear threshold facility, i.e. no channel in floor




Maximum door width normally 1500 mm

A Channel

Pre-drilled for countersunk screws. Bright aluminium

Length	2.1 m	3.0 m
Cat. No.	942.51.721	942.51.730

Order qty: 1 pc (2.1 or 3.0 m length)

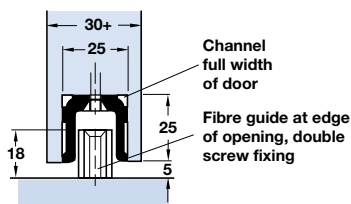

B Guide

Opaque fibre/polypropylene

Cat. No.	407.51.059
----------	------------



Order qty: 1 pc (1 pc required per panel)

Light duty guiding:

C Guide. Light duty. Steel plate with nylon blade

Cat. No.	409.12.990
----------	------------

Order qty: 1 pc (2 pcs required per panel)



D Channel

Pre-drilled for countersunk screws. Bright aluminium

Length	2.1 m	3.0 m
Cat. No.	409.14.010	409.14.029

Order qty: 1 pc (2.1 or 3.0 m length)



Medium duty guiding:

E Guide

Steel with nylon pilot

Cat. No.	407.49.111
----------	------------

Order qty: 1 pc (2 pcs required per panel)



F Channel

Pre-drilled for countersunk screws. Brass

Length	2.0 m	3.0 m
Cat. No.	407.66.827	407.66.836

Order qty: 1 pc (2.0 or 3.0 m length)

G Channel

Pre-drilled for countersunk screws. Anodised aluminium

Length	2.5 m	3.5 m
Cat. No.	940.41.250	940.41.350

Order qty: 1 pc (2.5 or 3.5 m length)




Heavy duty guiding:

H Guide

Stainless steel grade 316 with brass roller

Cat. No.	930.10.000
----------	------------

Order qty: 1 pc (2 pcs required per panel)



I Channel

Pre-drilled for countersunk screws. Bright aluminium

Length	2.1 m	3.0 m
Cat. No.	942.51.721	942.51.730

Order qty: 1 pc (2.1 or 3.0 m length)


J Channel

Pre-drilled for countersunk screws. Stainless steel

Length	2.1 m	2.5 m
Cat. No.	943.26.921	943.26.925

Order qty: 1 pc (2.1 or 2.5 m length)

Alternative channels:



K Channel

Pre-drilled for countersunk screws. Galvanized steel

Length	2.1 m	3.0 m
Cat. No.	942.51.621	942.51.630

Order qty: 1 pc (2.1 or 3.0 m length)

