## HAFELE

All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.


## A Mortice cylinder 3 point lock

- Operation: Latchbolt operated by lever handles.
   Deadbolts operated by lifting lever and the dead-locking by cylinder
- Cases: Steel, BZP CR3 passivate, 14.5 mm thick
- Front plate: Square, 1 piece. Steel, BZP CR3 passivate 2250 mm x 16/20 mm wide
- Keeps: Not included, must be ordered separately
- Latchbolt: Brass, satin chrome plated.

  Reversible
- Deadbolt: Brass, satin chrome plated. 22 mm throw
- Linear bolts: Forged brass, satin chrome plated.
   22 mm overall throw
- Follower: 8 mm brass. For use with standard 92 mm unsprung lever handles
- Accepts most europrofile cylinders
- Not suitable for rebated doors
- Designed to meet the requirements of PAS 23 and PAS 24
- · Licensed by Secured by Design
- 10 year guarantee
- 35 or 45 mm backset
- Fixing screws are not included
- Optional shoot bolt engagement for additional security available, shown below
- Order cylinders separately; see pages 40-50
- Order keeps separately; shown on page 33
- For lever handles refer to page 35

Backset 35 mm	
Front plate length x width	Cat. No.
2250 x 16 mm	911.50.786
Backset 45 mm	
Front plate length x width	Cat. No.
2250 x 16 mm	911.50.787
2250 x 20 mm	911.50.788

Order qty: 1 pc

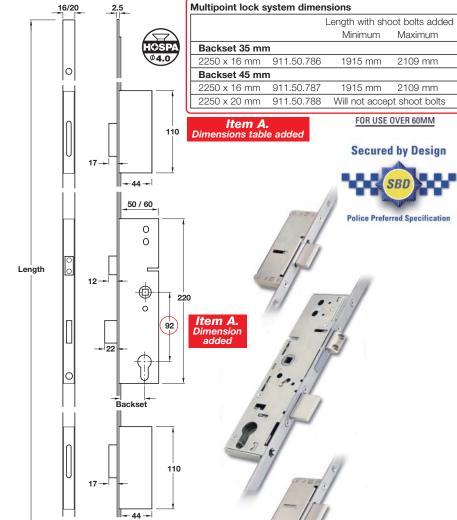


## B Security shoot bolt

- Additional security for mortice cylinder 3 point locks A shown above and on page 33 (for use with 16 mm front plate width only)
- Steel, BZP CR3 passivate

Cat. No.	911.50.797	

Order qty: 1 pc

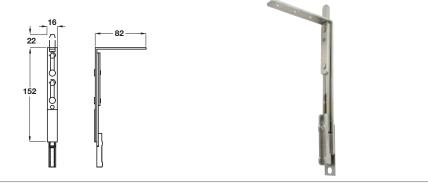


## C Security shoot bolt keep

- Designed to suit bolt B
- Steel, BZP CR3 passivate


Type	Cat. No.
Corner	911.50.798
Double	911.50.799

Order qty: 1 pc



Corner keep

0







11.06.09/2\*