


Please order screws in multiples of quantity shown

A Clutch head one way shoulder screw and barrel nut

- Screw and barrel nut must be ordered separately
- High security panel fixing etc.
- Slotted screwdriver to tighten
- 10.24 UNC thread
- Cannot be removed
- Mild steel, chrome plated

Screw length	Shoulder length	Cat. No.
18.7 mm	6.8 mm	042.24.201
23.4 mm	4.8 mm	042.24.202
26.1 mm	6.6 mm	042.24.203
30.0 mm	6.6 mm	042.24.204
33.0 mm	6.7 mm	042.24.205
Barrel length	Cat. No.	
13 mm	042.24.211	
16 mm	042.24.212	



Order qty: Multiples of 100 pcs

4


B Shear-nut

- High security permanent nut fastening
- Hexagonal part of nut shears off at predetermined torque
- BZP mild steel


Size	Spanner Size	Torque	Cat. No.
M6	14 mm	7 - 14 nm	264.99.106
M8	16 mm	14 - 20 nm	264.99.108
M10	19 mm	31 - 38 nm	264.99.110
M12	22 mm	52 - 60 nm	264.99.112



Order qty: Multiples of 100 pcs

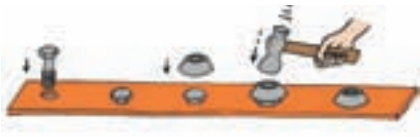

Insert bolt, place armour ring over bolt head and use hammer to fix in place.

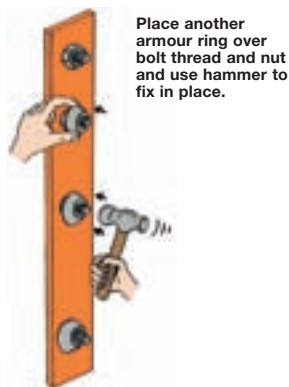

Place another armour ring over bolt thread and nut and use hammer to fix in place.




Bolt heads and nuts tamper proof with armour rings firmly fixed in place.

C Armour ring

- To render hexagon heads and nuts tamper proof
- Uses standard hammer
- Mild steel, bright zinc plated and A2 stainless steel

Size	Bright zinc plated	Stainless steel
M6	264.99.151	264.99.161
M8	264.99.152	264.99.162
M10	264.99.153	264.99.163



Order qty: Multiples of 100 pcs

D Standard magnetic handriver

- Magnetic screwdriver
- Storage area in handle for interchangeable bits
- Stainless steel shaft, plastic handle

Cat. No.	006.40.320
----------	------------

Order qty: 1 pc

