


A Intumescent fire grill

- 44 mm thick
- To suit FD30 and FD60 fire rated doors
- Tested to BS476 part 22
- For use in walls, floors, doors and ducts
- To be used in conjunction with 2 air transfer grills, item B
- Vermin proof wire mesh
- 80 % free air
- LANTAC Building Control Approved
- NHBC Type Approved
- Mineral fibre with intercolated graphite and organic fibre (latex)

Overall size Width x Height	Free air flow	Cat. No.
150 x 150 mm	180 cm ²	959.20.200
200 x 200 mm	320 cm ²	959.20.201
300 x 300 mm	720 cm ²	959.20.202
350 x 350 mm	980 cm ²	959.20.203
400 x 200 mm	640 cm ²	959.20.204
450 x 250 mm	900 cm ²	959.20.205
450 x 450 mm	1620 cm ²	959.20.206
500 x 500 mm	2200 cm ²	959.20.207
600 x 600 mm	2880 cm ²	959.20.208

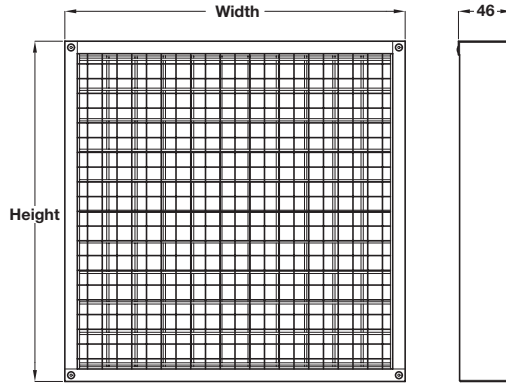

Order qty: 1 pc

Available to order: Sizes from 100 x 100 mm upwards, maximum size 600 x 600 mm (subject to quantity)
A combination of grilles may be used to achieve a larger free air flow.



Item B.
Text added


B Louvred air transfer grill

- Suitable for use with fire grill A or on their own
- Horizontal louvres set on 8.5 mm pitch
- 30 % downward deflection
- Sizes depicted are for cut out of door required, allow for flange around the plate
- 20swg mild steel, satin silver finish

Item B.
Catalogue shows actual vent dimensions. Illustration and text amended to show cut out dimensions

Please note: Configuration of vents varies depending on size

Cut out of door required Width x Height	Cat. No.
152 x 152 mm	959.20.009
203 X 203 mm	959.20.019
305 X 305 mm	959.20.029
356 X 356 mm	959.20.039
406 X 203 mm	959.20.049
457 X 254 mm	959.20.059
457 X 457 mm	959.20.069
508 X 508 mm	959.20.079
610 X 610 mm	959.20.089

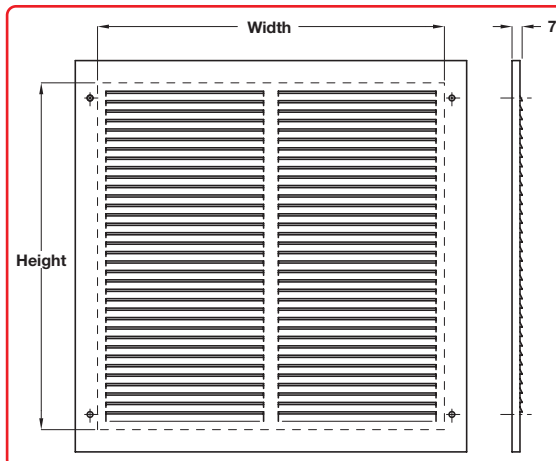

Order qty: 1 pc

Available to order: Sizes from 102 x 102 mm upwards, maximum size 610 x 610 mm actual free vent area, white finish (subject to quantity)
A combination of grilles may be used to achieve a larger free air flow.

TCH-A1 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.