

Panic Exit Devices

Panic Latches

For further information on **BS EN 1125** and **BS EN 179**, please refer to the Standards pages shown at the back of this catalogue

Panic hardware maintenance

It is important that all panic and emergency exit hardware devices are inspected and maintained properly to ensure safety is maintained when exiting a building in any situation.

Once a device is fitted, regular maintenance is recommended.

Weekly:


- Make sure the exit device functions correctly
- Any fixings that have worked loose should be re-secured
- Any damaged components should be replaced
- Ensure there are no obstructions which prevent the panic unit from functioning correctly

Every three months:

- Check for wear, any visible worn components should be replaced





BS EN 1125:1997 A1:2001



A Mortice actuated panic latch

- For single outward opening doors up to max. 1220 mm wide
- Push bar supplied with plugs for on-site cutting
- Suits either hand
- Exit only
- See Section 2 pages 38-51 for cylinders if required to open externally
- Tested and approved to BS EN 1125
- Fixings included, for timber doors
- Self adhesive vinyl 'Push bar to open' sign included
- Diecast aluminium and mild steel. Epoxy powder coated or plated finish*
- **Please note:**
We strongly recommend the use of hinge bolts or security hinges with panic hardware
- Other lengths available to order, subject to quantity
- RAL colours available to order, subject to quantity**
- For screw fixing versions of signage associated with panic exit devices, i.e. 'Push bar to open' and 'Fire escape keep clear' refer to pages 10 and 12

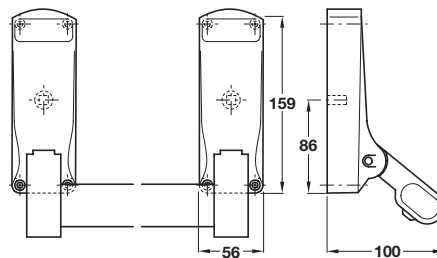

Finish	Cat. No.
Silver	911.52.329
Gold	911.52.328
Satin stainless steel	911.52.320*
Polished stainless steel	911.52.321*
Polished brass	911.52.325*
RAL colours	To order**

Order qty: 1 set



4





BS EN 179:1998 A1:2001



B Push pad panic mortice latch

- For single outward opening doors
- Suits either hand
- Exit only
- See Section 2 pages 38-51 for cylinders if required to open externally
- Tested and approved to BS EN 179
- Fixings included, for timber doors
- Self adhesive vinyl 'Push pad to open' sign included
- Diecast aluminium and mild steel. Epoxy powder coated finish
- **Please note:**
We strongly recommend the use of hinge bolts or security hinges with panic hardware
- Other finishes available to order, subject to quantity
- For screw fixing versions of signage associated with panic exit devices, i.e. 'Push pad to open' and 'Fire escape keep clear' refer to pages 10 and 12



Finish	Cat. No.
Silver grey	911.52.379

Order qty: 1 set



TCH-A1 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.