



All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

A Mortice cylinder slave unit

- **Operation:** Shoot bolt operated by lever handles. Deadlock by cylinder
- **Case:** Steel, BZP CR3 passivate, 14.5 mm thick
- **Front plate:** Square, 1 piece. Steel, BZP CR3 passivate. 2120 mm (including shoot bolts) x 16 mm wide. Front plate can be shortened by max. 130 mm top and bottom
- **Keeps:** Not included, must be ordered separately
- **Follower:** 8 mm brass. For use with standard 92 mm **unsprung** lever handles
- Accepts most europrofile cylinders
- Corrosion resistance: Plated to BS EN 1670 Grade 4
- Designed to meet the requirements of PAS 23 and PAS 24
- 10 year guarantee
- **35 or 45 mm** backset
- Fixings screws are not included
- **Order hi-security shoot bolts separately;** see below, item **B**
- **Order cylinders separately;** see **Section 2**
- **Order keeps separately;** see below

Front plate width: 16 mm	Cat. No.
Backset 35 mm	911.50.790

Order qty: 1 pc

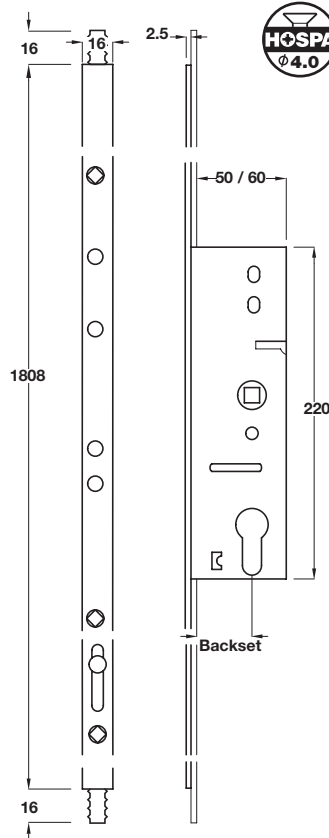


7

B Security shoot bolt

- Additional security for mortice cylinder espagnolette bolt **A** shown above and on page **37** (for use with 16 mm front plate width only)
- Steel, BZP CR3 passivate

Cat. No.	911.50.797
----------	------------

Order qty: 1 pc




C Security shoot bolt keep, corner

- Designed to suit bolt **B**
- Steel, BZP CR3 passivate

Cat. No.	911.50.798
----------	------------

Order qty: 1 pc



Corner keep




D Security shoot bolt keep, double

- Designed to suit bolt **B**
- Steel, BZP CR3 passivate

Cat. No.	911.50.799
----------	------------

Order qty: 1 pc



Double keep



TCH-A1 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.