



Internal stations, flush mounted

- Modular construction, allowing easy installation and expansion
- The home stations and insert modules are installed in a cover frame in round flush-mounted wall boxes
- Home stations can be expanded by adding a colour display insert module
- All inserts and the door communication bus coupler are interconnected via flat ribbon cables included with the devices
- Hands-free or receiver versions available
- Operating button controls functions; open door, call tone, control speech and switch light
- Home stations can be extended with call buttons for internal intercom communication from home station to home station and with TFT display
- Cover frames made of shatter-proof material, aluminium or mint, white or black solid glass
- Available in pure white glossy or aluminium - other colours available, information on request

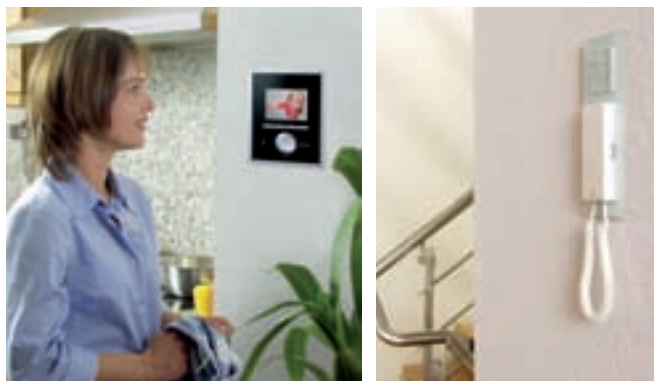

Other designs, styles and colours are also available - information on request.

For full details on these products, please refer to our **Electronic Security and Access Control** catalogue, **Section 12** - Gira Audio/Video Entry Systems



Home station insert module mounted horizontally in 2-gang black glass cover frame - order home station and cover frame separately

A Home station, flush mounted, hands-free

- For installation in flush mounted wall box, shown on page 21
- Esprit cover frame must be ordered separately, shown on page 17, item B
- Power supply: 26V DC \pm 2V (bus voltage)
- Bus coupler connections: 2 terminal screws for 2-wire bus, 2 terminal screws for level-call button, 2 system bus plug strips, 1 video plug strip
- Speech insert connections: 2 system bus plug strips
- **Consists of:**
 - Operating buttons for hands-free feature
 - Loudspeaker top unit with speech insert
 - 6-pole audio connection cable
 - Door communication bus coupler
- **Operating buttons control the following functions:**
 - Switching of light and other functions in conjunction with switching actuator Cat. No. 912.08.912, shown on page 19
 - Control of the door opener
 - Activation/deactivation of call tone
 - Call acceptance
 - Activation of the enforcement function
 - Volume control of calling tone and speech volume
- **Features:**
 - Parallel switching of up to 3 home stations is possible
 - Unique calling tones for door call, level call and internal call
 - Operating buttons with integrated LEDs for status display
 - Hands-free feature (voice-controlled talk-back with echo and background noise suppression)
 - Enforcement function for loud background noise during speech connection
 - Free intercom communication within the house in combination with the call button for home stations
 - Eavesdropping prevention
 - Temperature range: -5°C to 50°C
- Made of thermoplast

Finish	Cat. No.
Pure white	912.08.527
Aluminium	912.08.529

Order qty: 1 pc



Home station with receiver mounted with TFT colour display in 3-gang anodised aluminium cover frame - order home station, TFT display and cover frame separately

B Home station, flush mounted, with receiver

- For installation in flush mounted wall box, shown on page 21
- Esprit cover frame must be ordered separately, shown on page 17, item B
- Power supply: 26V DC \pm 2V (bus voltage)
- Bus coupler connections: 2 terminal screws for 2-wire bus, 2 terminal screws for level-call button, 2 system bus plug strips, 1 video plug strip
- Receiver insert connections: 1 system bus plug strip, 1 receiver connection
- **Consists of:**
 - Hook with cable branch and operating buttons
 - Receiver with receiver cable and receiver insert
 - 6-pole audio connection cable
 - Door communication bus coupler
- **Operating buttons control the following functions:**
 - Switching of light and other functions in conjunction with switching actuator Cat. No. 912.08.912, shown on page 19
 - Control of the door opener
 - Volume control of calling tone
- **Features:**
 - Parallel switching of up to 3 home stations is possible
 - Unique calling tones for door call, level call and internal call
 - Free intercom communication within the house in combination with the call button for home stations
 - Eavesdropping prevention
 - Call acceptance via receiver pick-up
 - Magnetic receiver hook with integrated cable
 - Insertable receiver cable for easy installation
 - Temperature range: -5°C to 50°C
- Made of thermoplast

Finish	Cat. No.
Pure white	912.08.537
Aluminium	912.08.539

Order qty: 1 pc