

For full details on all these products, please refer to our **Electronic Security and Access Control** catalogue, **Section 6** - Locking Hardware



### A Mini electromagnetic lock

- Single door, single swing unit
- Holding force **270 kg**
- Lock dims (height x width x depth): 42 x 250 x 25 mm  
Plate dims (height x width x depth): 38 x 185 x 12 mm
- Always fail unlocked
- Option of door status monitor (DSM)
- LED indicator on underside of monitored version
- Steel armature fixed through door provides secure mounting
- 12V/24V DC
- Current consumption - 500 mA @ 12V, 250 mA @ 24V
- 3 year warranty
- Aluminium body

| Option  | Unmonitored | Monitored  |
|---------|-------------|------------|
| Cat.No. | 912.05.011  | 912.05.013 |

Order qty: 1 pc



### C 'Z' and 'L' brackets

- To convert magnet for inswinging doors
- To suit items **A** and **B** (2 brackets required for **B**)
- 'Z' bracket dims (height x width x depth): 50 x 185 x 50 mm  
'L' bracket dims (height x width x depth): 48 x 250 x 30 mm
- Steel, silver finish

|          |            |
|----------|------------|
| Cat. No. | 912.05.023 |
|----------|------------|

Order qty: 1 set




### D 'L' bracket

- For doors without overhead reveal
- To suit items **A** and **B** (2 brackets required for **B**)
- Dims (height x width x depth): 48 x 250 x 30 mm
- Steel, silver finish

|          |            |
|----------|------------|
| Cat. No. | 912.05.024 |
|----------|------------|

Order qty: 1 pc

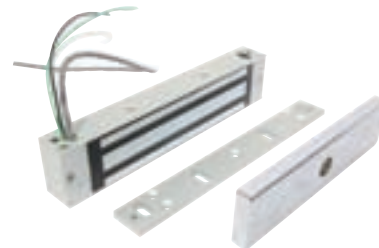

### E Micro electromagnetic lock

- Single door, single swing unit
- Holding force **180 kg**
- Lock dims (height x width x depth): 34 x 166 x 21 mm  
Plate dims (height x width x depth): 32 x 130 x 9 mm
- Always fail unlocked
- Monitored
- Steel armature fixed through door provides secure mounting
- 12V/24V DC
- Current consumption - 630 mA @ 12V, 315 mA @ 24 V
- 5 year warranty
- Aluminium body

|          |            |
|----------|------------|
| Cat. No. | 912.05.060 |
|----------|------------|

Order qty: 1 set



### F Z and L bracket

- To convert magnet for inswinging doors
- For use with micro electromagnetic lock **E**
- Dims (height x width x depth): 42 x 166 x 30 mm
- Steel, silver finish

|         |            |
|---------|------------|
| Cat.No. | 912.05.070 |
|---------|------------|

Order qty: 1 set



### B Double mini electromagnetic lock

- Double door, single swing unit
- Holding force **270 kg** per magnet
- Lock dims (height x width x depth): 42 x 500 x 25 mm  
Plates (x2) dims (height x width x depth): 38 x 185 x 12 mm
- Always fail unlocked
- Option of door status monitor (DSM)
- LED indicator on underside of monitored version
- Steel armature fixed through door provides secure mounting
- 12V/24V DC
- Current consumption - 500 mA @ 12V, 250 mA @ 24V per magnet
- 3 year warranty
- Aluminium body

| Option  | Unmonitored | Monitored  |
|---------|-------------|------------|
| Cat.No. | 912.05.012  | 912.05.014 |

Order qty: 1 pc