

For full details on all these products, please refer to our **Electronic Security and Access Control** catalogue, **Section 6** - Locking Hardware



A Shearlock, surface fixing

- Door position switch
- Shear force up to **1000 kg**
- Lock dims (height x width x depth): 38 x 204 x 38 mm
Plate dims (height x width x depth): 38 x 204 x 38 mm
- Always fail unlocked
- Monitored
- 12V/24V DC
- 1.5A pull in for 2 seconds
- 0.5A continuous hold
- Aluminium body

Cat. No. 912.05.067

Order qty: 1 set




B Glass fixing set

- For use with surface fixing shearlock **A**
- One per housing required, i.e. 2 required for shearlock **A**
- Dims (height x width x depth): 25 x 200 x 42 mm
- Aluminium

Cat.No. 912.05.076

Order qty: 1 set

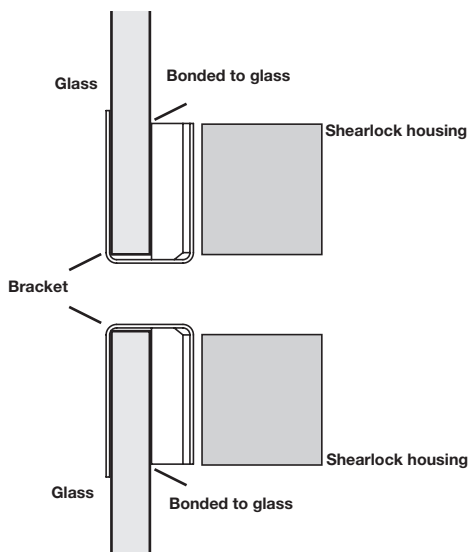

C Adhesive

- To attach mounting plate to glass door
- One required per door

Cat. No. 912.05.080

Order qty: 1 pc



D Shearlock, mortice fixing

- Door position switch
- Shear force up to **1000 kg**
- Lock dims (height x width x depth): 30 x 164 x 21 mm
Plate dims (height x width x depth): 30 x 164 x 25 mm
- Always fail unlocked
- Monitored
- 12V/24V DC
- 1.5A pull in for 2 seconds
- 0.5A continuous hold
- Aluminium body

Cat. No. 912.05.066

Order qty: 1 set



E Electric lock, double action

- To suit single and double action doors
- Case height: 196 mm, Forend: 256 x 25 mm
- Two-way latch bolt mechanism
- Provision for euro profile cylinder (cylinder not included, refer to Section 2)
- Choice of 3 backsets
- Monitored
- Fail secure or fail safe
- 12V DC
- Working current 320mA
- Single and double strike plates included
- Fixing set included
- Stainless steel forend

Backset	Case size	Fail secure	Fail safe
25 mm	30 mm	911.24.015	911.24.018
30 mm	35 mm	911.24.016	911.24.019
35 mm	40 mm	911.24.017	911.24.020

Order qty: 1 set

TCH-AI 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.