

For information on glass preparation, please contact the Architectural Ironmongery department



For mounting and care information, see page 90

### A Bottom H-profile with drip rail lip 135°

- For toughened glass thickness 6 - 8 mm
- Transparent PVC

Cat. No. 950.22.090

Order qty: 1 pc (1 pc = 2010 mm)


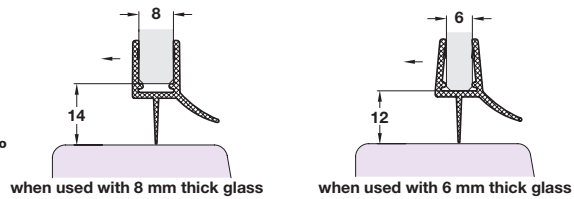


### B H-profile for overlapping shower door arrangement

- For toughened glass thickness 6 - 8 mm
- Transparent PVC

Cat. No. 950.22.120

Order qty: 1 pc (1 pc = 2010 mm)





### C Bottom seal

- For toughened glass thickness 8 mm
- Transparent PVC

Cat. No. 950.22.130

Order qty: 1 pc (1 pc = 2010 mm)



**Item E. removed and added into item D**

### D Bottom H-profile with bulb seal

- For toughened glass thickness 6 - 8 mm
- Transparent PVC

Length	Cat. No.
2010 mm	950.22.160
1150 mm	950.22.170

Order qty: 1 pc

