


For information on glass preparation,
please contact the Architectural
Ironmongery department

A Edge wipe 135°

- For toughened glass thickness 6 - 8 mm
- Transparent PVC

Cat. No.	950.22.140
----------	------------

Order qty: 1 pc (1 pc = 2010 mm)




B Seal with sealing lip for sliding door

- For toughened glass thickness 6 - 8 mm
- Transparent PVC

Cat. No.	950.22.150
----------	------------

Order qty: 1 pc


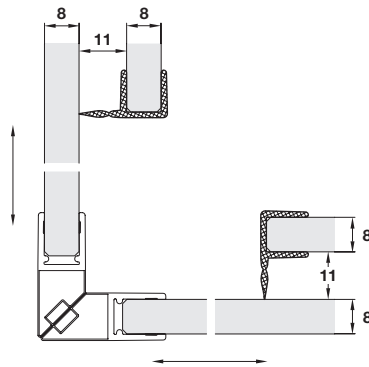


C Wall attachment bar for seals

- Fixings included
- Aluminium

Finish	Cat. No.
White coloured	950.22.180

Order qty: 1 pc (1 pc = 2000 mm length)

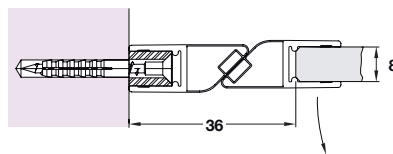

9



D Threshold seal

- 2 different thicknesses for variable panel heights
- For use with Item C, page 93
- Clear acrylic

Length	Width	Cat. No.
1000 mm	20 mm	950.22.260
2000 mm	20 mm	950.22.270
1000 mm	10 mm	950.22.280
2000 mm	10 mm	950.22.290

Order qty: 1 pc

Item D.
Catalogue shows...
'White acrylic'
Correct Finish is
'Clear acrylic'

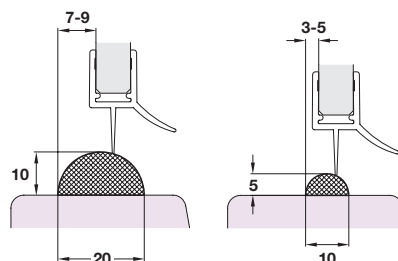

27.08.08/1*